


RoHS COMPLIANT

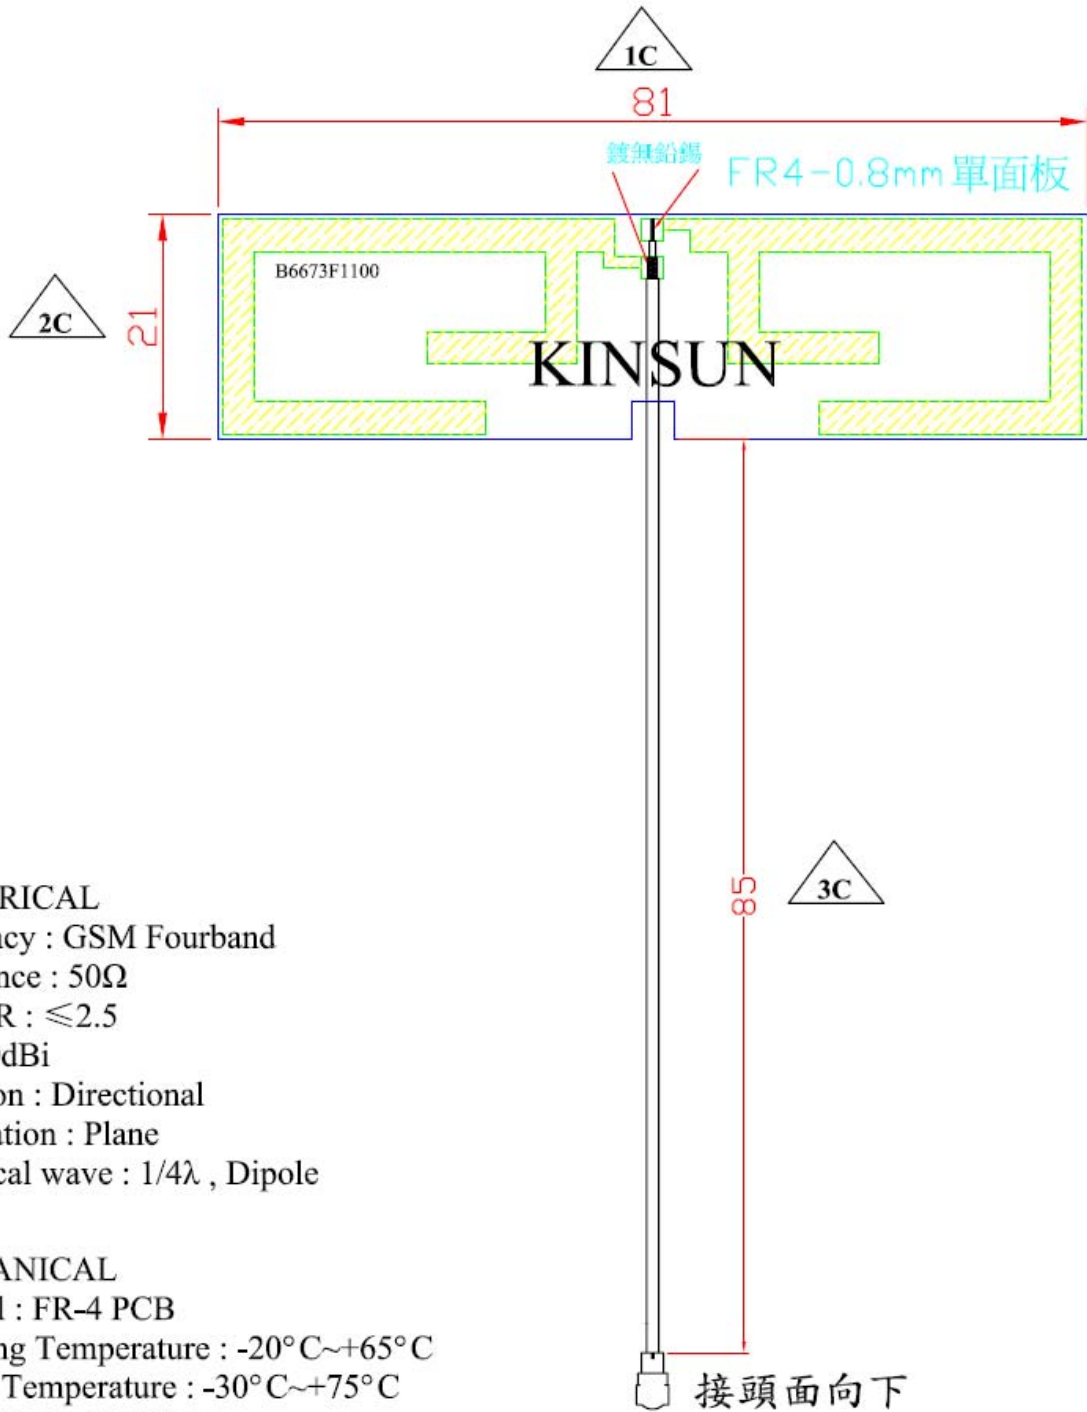


ELECTRICAL

Frequency : GSM Fourband
 Impedance : 50Ω
 V.S.W.R : ≤2.5
 Gain : 0dBi
 Radiation : Directional
 Polarization : Plane
 Elwctrical wave : 1/4λ , Dipole

MECHANICAL

Material : FR-4 PCB
 Operating Temperature : -20°C~+65°C
 Storage Temperature : -30°C~+75°C
 Coaxial Cable : ∅1.13mm
 Connector : U.F.L

I-PEX接頭 

設計DR. Wind-Kuo 2008/12/04	核准APPD. Jerry 2008/12/04	容許公差 .XXX ±0.10 .XX ±0.25 .X ±0.38 X ±0.50 ANG ±3°	TOLERANCE	品名 ARTICLE GSM四頻-PCB天線
版本說明	REVISION NOTE			圖號 DWG NO 6673 GSM Antenna
			單位 UNIT mm	比例SCALE 1/1
			張數SHEET 1/1	版本REV. A