

# PRODUCT SPECIFICATION

**Model No.: FYM-12573A/BX-XX**

## Descriptions & Features:

- 1.2 inch (42.00mm) Matrix height, Dot Matrix Display
- 5\*7 Array with X-Y Select.
- Case mold type.
- RoHS compliant.
- Low current operation
- Low power consumption.
- Easy mounting on P.C. board or socket.



| CUSTOMER APPROVED SIGNATURES | APPROVED BY | CHECKED BY | PREPARED BY |
|------------------------------|-------------|------------|-------------|
|                              |             |            |             |

**NINGBO FORYARD OPTOELECTRONICS CO.,LTD**

**Add:** NO.115 Qixin Road Ningbo Zhejiang China

**Zip:** 315051

**Tel:** 0086-574-87933652 87927870 87922206

**Fax:** 0086-574-87927917

**E-mail:** Sales@foryard.com (General)


[Http://www.foryard.com](http://www.foryard.com)

Model No.: FYM-12573A/BX-XX

■ -XX: REF Surface / Epoxy color

| Color \ Number    | 0                                 | 1                           | 2                          | 3                           | 4                            |
|-------------------|-----------------------------------|-----------------------------|----------------------------|-----------------------------|------------------------------|
| REF Surface Color | <input type="radio"/> White       | <input type="radio"/> Black | <input type="radio"/> Gray | <input type="radio"/> Red   | <input type="radio"/> Green  |
| Epoxy Color       | <input type="radio"/> Water Clear | <input type="radio"/> White | <input type="radio"/> Red  | <input type="radio"/> Green | <input type="radio"/> Yellow |

■ Mechanical Dimensions

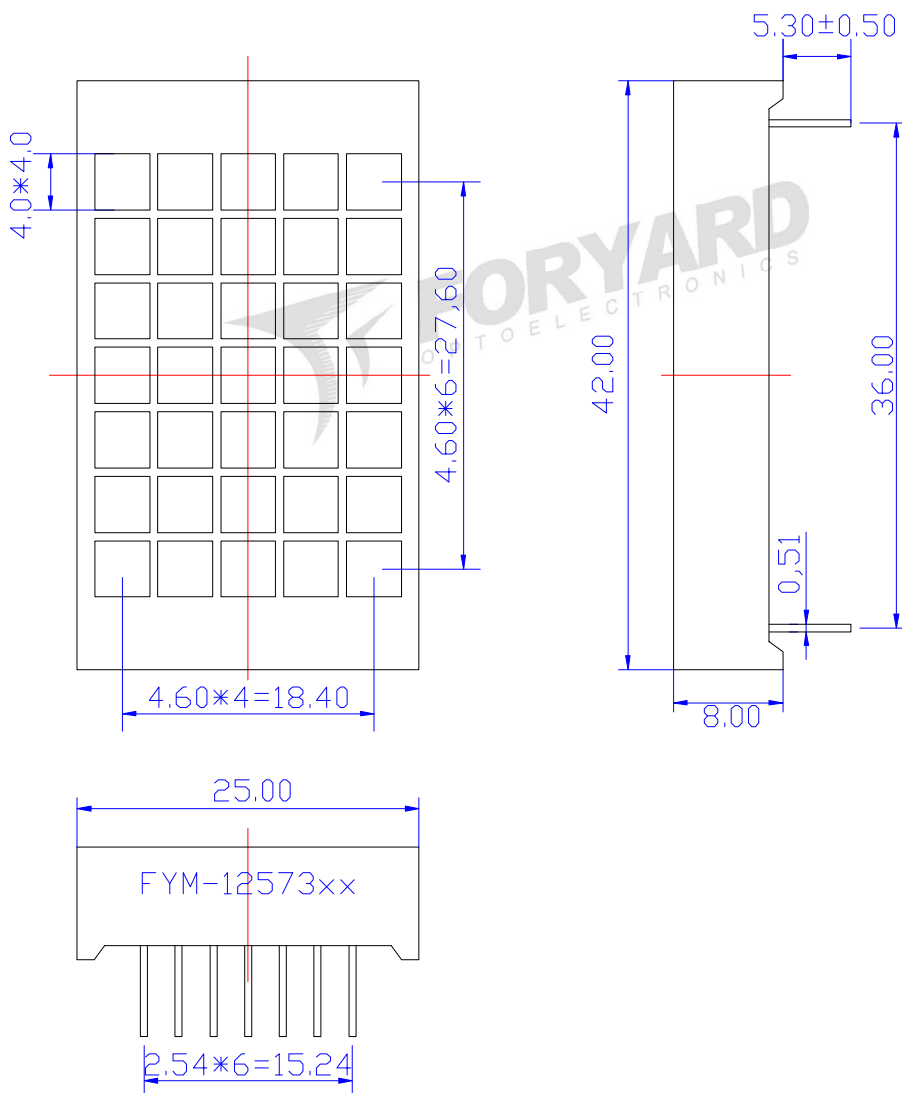


Notes:

1. All pins are  $\Phi 0.51 [0.020]$ mm
2. Dimension in millimeter [inch], tolerance is  $\pm 0.25 [0.010]$  and angle is  $\pm 1^\circ$  unless otherwise noted.
3. Bending  $\leq$  Length \* 1%.
4. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.


**Model No.: FYM-12573A/BX-XX**

**■ All Light On Dot Feature & Pin Position**

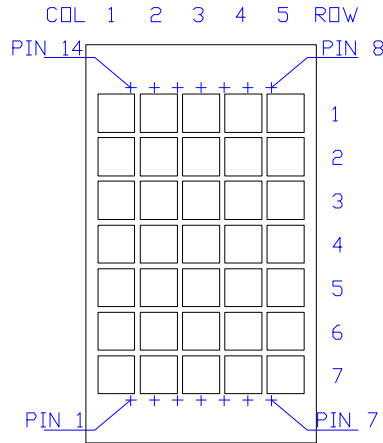


**■ Internal Circuit Diagrams**

FYM-12573AX

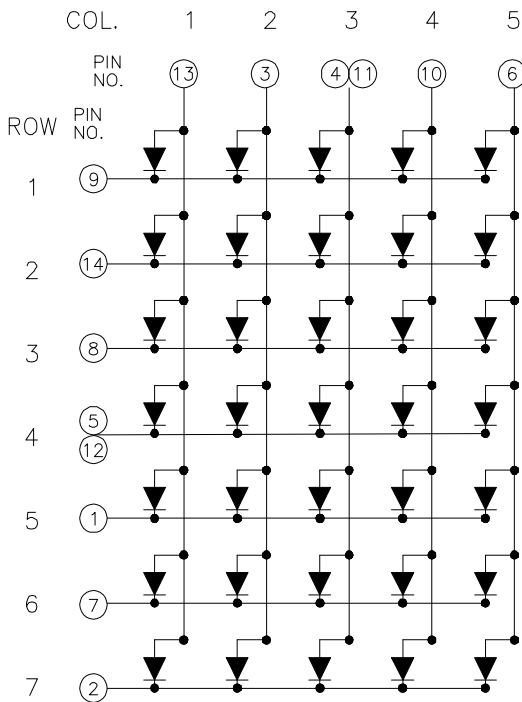

FYM-12573BX

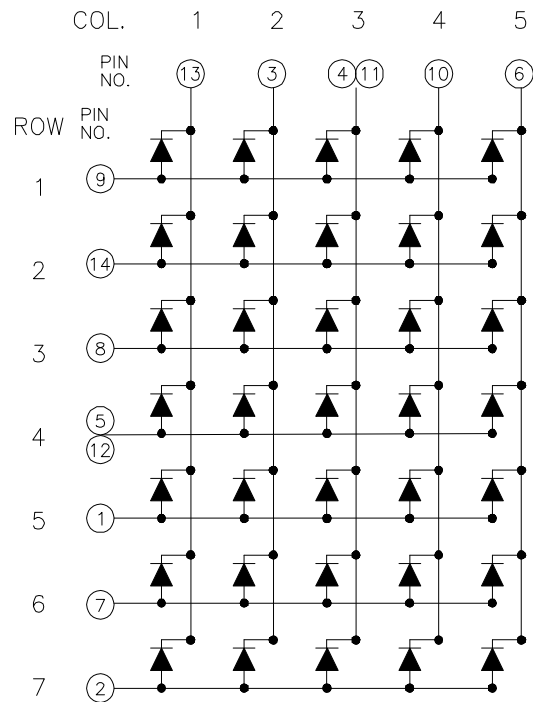

Model No.: FYM-12573A/BX-XX

■ Absolute maximum ratings

(Ta=25°C)

| Parameter             | Symbol | Test Condition  | Value |     | Unit |
|-----------------------|--------|-----------------|-------|-----|------|
|                       |        |                 | Min   | Max |      |
| Reverse Voltage       | VR     | IR=30           | 5     | —   | V    |
| Forward Current       | IF     | —               | —     | 30  | mA   |
| Power Dissipation     | Pd     | —               | —     | 100 | mW   |
| Pulse Current         | Ipeak  | Duty=0.1mS,1KHz | —     | 150 | mA   |
| Operating Temperature | Topr   | —               | -40   | +85 | °C   |
| Storage Temperature   | Tstr   | —               | -40   | +85 | °C   |

■ Electrical-Optical Characteristics

● Color Code & Chip Characteristics:(Test Condition:IF=20mA)

(Ta=25°C)


| Emitting Color                            | Dice Material      | Peak Wave Length( $\lambda_p$ ) | Spectral Line halfwidth( $\Delta\lambda_{1/2}$ ) | Forward Voltage(VF) Unit:V |      | Luminous Intensity (Iv) Unit:mcd |            |
|-------------------------------------------|--------------------|---------------------------------|--------------------------------------------------|----------------------------|------|----------------------------------|------------|
|                                           |                    |                                 |                                                  | Typ                        | Max  |                                  |            |
| <b>Standard brightness</b>                |                    |                                 |                                                  |                            |      |                                  |            |
| H                                         | Red                | GaP                             | 700nm                                            | 90nm                       | 2.00 | 2.50                             | 1          |
| S                                         | Hi Red             | AlGaAs/SH                       | 660nm                                            | 20nm                       | 1.80 | 2.50                             | 15~20      |
| D                                         | Super Red          | AlGaAs/DH                       | 650nm                                            | 20nm                       | 1.90 | 2.50                             | 26~38      |
| E                                         | Orange             | GaAsP                           | 625nm                                            | 35nm                       | 1.90 | 2.50                             | 14~20      |
| A                                         | Amber              | GaAsP                           | 610nm                                            | 35nm                       | 1.90 | 2.50                             | 13~18      |
| Y                                         | Yellow             | GaAsP                           | 590nm                                            | 35nm                       | 1.90 | 2.50                             | 13~18      |
| G                                         | Green              | GaP                             | 570nm                                            | 10nm                       | 1.90 | 2.50                             | 14~18      |
| B                                         | Blue               | InGaN                           | 430nm                                            | 60nm                       | 3.40 | 4.40                             | 0.7~1(mw)  |
|                                           |                    |                                 | 460nm                                            |                            | 2.80 | 3.80                             | 6~12(mw)   |
|                                           |                    |                                 | 470nm                                            |                            | 2.80 | 3.80                             | 6~12(mw)   |
| PG                                        | Pure Green         | InGaN                           | 520nm                                            | 36nm                       | 2.80 | 3.80                             | 4~6(mw)    |
| W                                         | White              | InGaN                           | X=0.29,Y=0.30                                    | CCT:9500K                  | 2.80 | 3.80                             | 20~30      |
| <b>Ultra brightness</b>                   |                    |                                 |                                                  |                            |      |                                  |            |
| UHR                                       | Ultra Hi Red       | AlGaInP                         | 640nm                                            | 20nm                       | 1.90 | 2.50                             | 30~60      |
| UR                                        | Ultra Red          | AlGaInP                         | 635nm                                            | 20nm                       | 1.90 | 2.50                             | 60~100     |
| UE                                        | Ultra Orange       | AlGaInP                         | 625nm                                            | 20nm                       | 1.90 | 2.50                             | 60~120     |
| UA                                        | Ultra Amber        | AlGaInP                         | 610nm                                            | 20nm                       | 1.90 | 2.50                             | 40~100~150 |
| UY                                        | Ultra Yellow       | AlGaInP                         | 590nm                                            | 20nm                       | 1.90 | 2.50                             | 50~140~190 |
| UG                                        | Ultra Green        | AlGaInP                         | 570nm                                            | 30nm                       | 1.90 | 2.50                             | 30~60~80   |
| PG                                        | Ultra Pure Green   | InGaN                           | 520nm                                            | 36nm                       | 2.80 | 3.80                             | 260~310    |
| BG                                        | Ultra Bluish Green | InGaN                           | 505nm                                            | 36nm                       | 2.80 | 3.80                             | 260~310    |
| UB                                        | Ultra Blue         | InGaN                           | 460nm                                            | 30nm                       | 2.80 | 3.80                             | 80~90~120  |
|                                           |                    |                                 | 470nm                                            | 30nm                       | 2.80 | 3.80                             | 80~90~120  |
| UW                                        | Ultra White        | InGaN                           | X=0.29,Y=0.30                                    | CCT:9500K                  | 2.80 | 3.80                             | 180~200    |
| Dot-to-Dot Luminous Intensity ratio(Iv-M) |                    |                                 | 1.5:1                                            |                            |      |                                  |            |

Note:

- 1.Luminous Intensity is based on the Foryard standards.
- 2.Pay attention about static for InGaN

Model No.: FYM-12573A/BX-XX

■ Packing Diagram

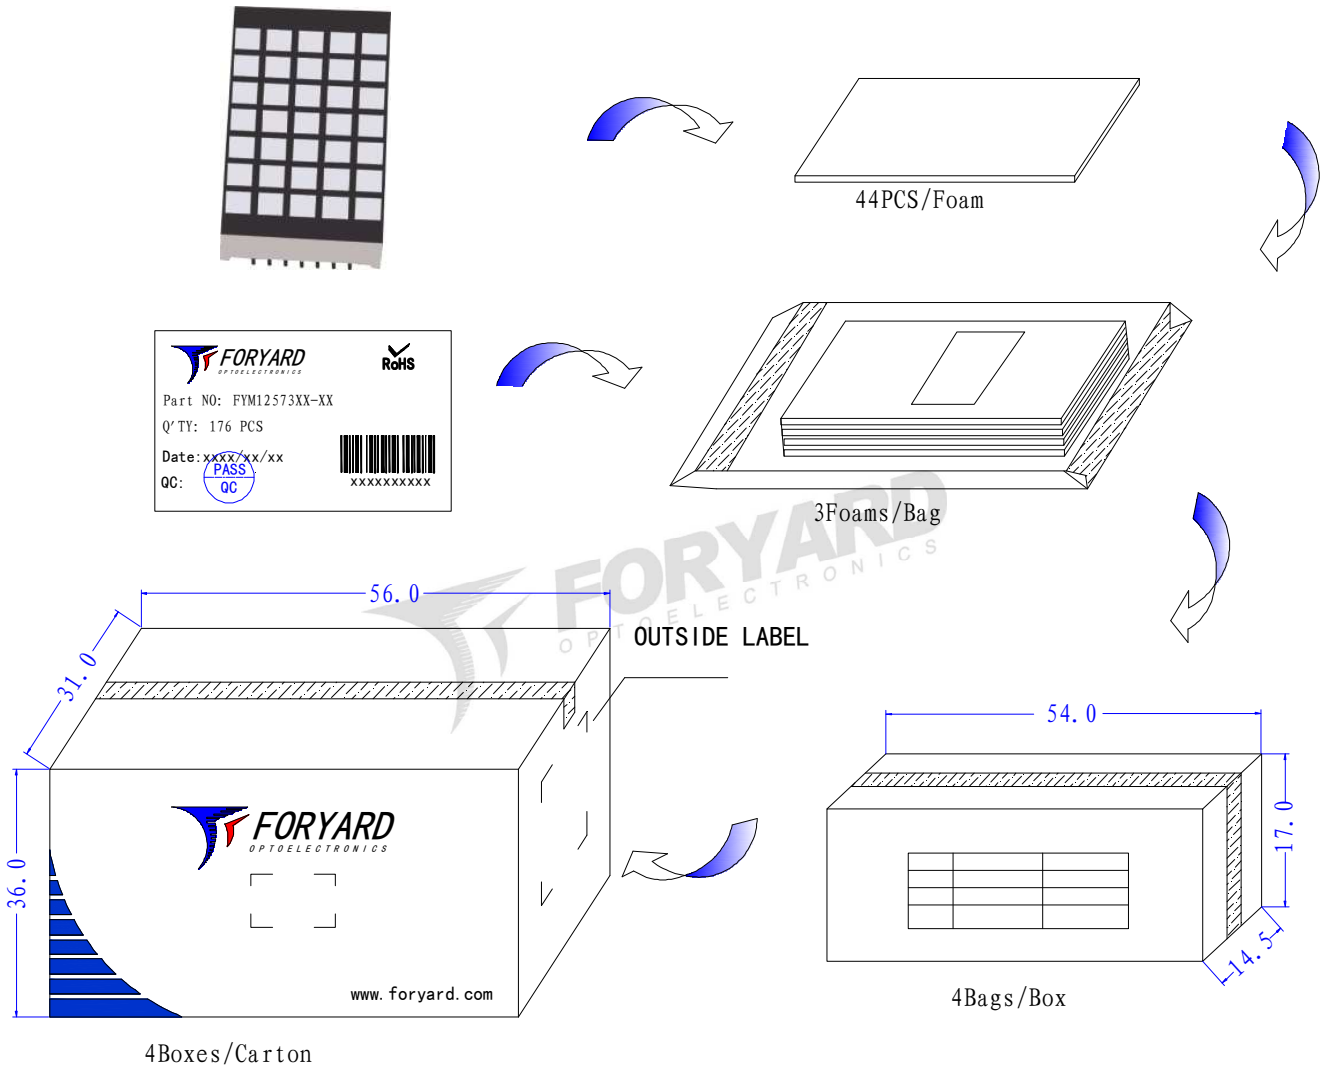

OUTSIDE LABEL

Note: The specifications are subject to change without notice. Please contact us for updated information.