
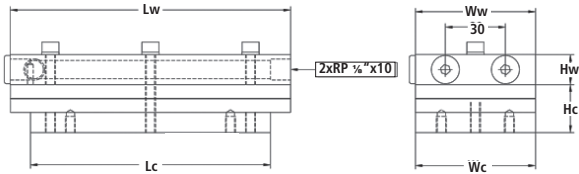


Direct-to-Liquid Systems (DL)

Direct-to-Liquid Assemblies cool or heat objects attached directly to the cold plate. Heat is dissipated into a liquid heat exchanger on the hot side. The liquid circuit is normally a re-circulating type that requires a pump and additional liquid heat exchanger that dissipates heat into the ambient environment. Specifications apply to the warm side liquid temperature of 32°C and nominal voltage with tolerances $\pm 10\%$.

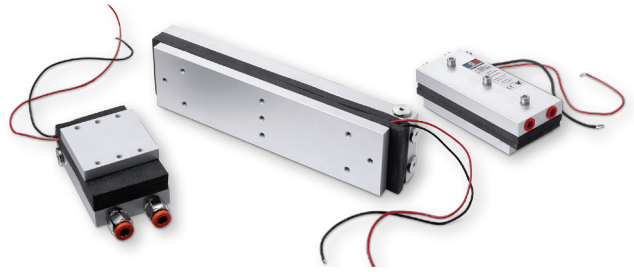

PART NO.	COOLING POWER (W)	NOMINAL VOLTAGE (V)	CURRENT (A)	WEIGHT (kg)	DIMENSIONS (mm)					
					Lw	Lc	Ww	Wc	Hw	Hc
DL-060-12-00-00	59	12	4.2	0.4	100	60	60	60	15	24
DL-120-24-00-00	122	24	4.2	0.7	140	120	60	60	15	24
DL-210-24-00-00	207	24	8.1	1.3	240	120	60	60	15	24