
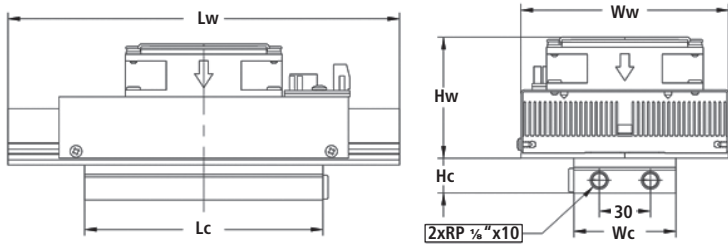


# Power Cool Series

## Liquid-to-Air Systems (LA)

Liquid-to-Air Assemblies cool or heat liquids that flow through a heat exchanger. The liquid heat exchanger is designed for a re-circulating system, absorbs heat and pumps it through the TEM, where it dissipates into the outside environment through an air heat exchanger. Specifications apply to an ambient temperature of 32°C and nominal voltage with tolerances  $\pm 10\%$ .

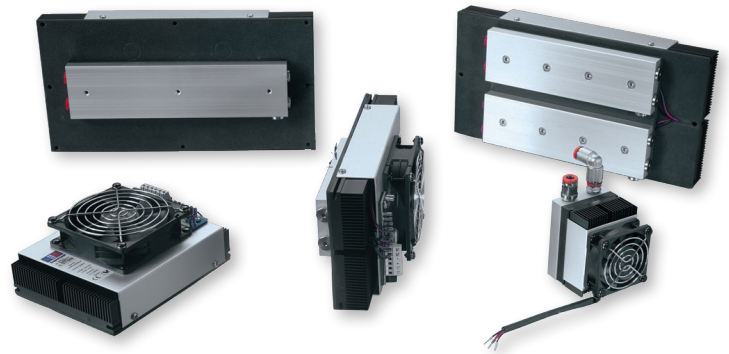

PART NO.	COOLING POWER (W)	NOMINAL VOLTAGE (V)	CURRENT (A)	WEIGHT (kg)	DIMENSIONS (mm)					
					Lw	Lc	Ww	Wc	Hw	Hc
LA-024-12-02-00-00	24	12	2.4	0.4	80	80	60	60	64	15
LA-024-24-02-00-00	24	24	2.0	0.4	80	80	60	60	64	15
LA-045-12-02-00-00	43	12	4.1	1.3	160	100	122	60	71	20
LA-045-24-02-00-00	47	24	2.8	1.3	160	100	122	60	71	20
LA-075-24-02-00-00	71	24	3.7	1.8	230	140	122	60	71	20
LA-115-24-02-00-00	113	24	5.8	3.0	300	240	152	60	78	20
LA-160-24-02-00-00	160	24	7.4	3.5	300	200	152	136	84	20