
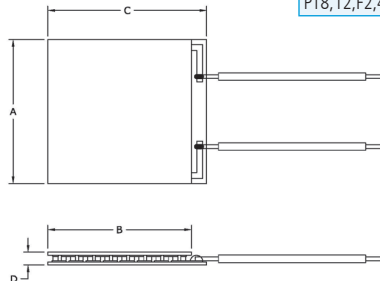


Thermoelectric MODULES

PolarTEC™

- Porch style ceramic for improved lead attachment
- Standard 4,6 and 8 Amp configurations available
- Designed for high volume production runs in consumer, food and beverage markets



PART NO.	QMAX ⁽¹⁾ (WATTS)	IMAX (AMPS)	VMAX (VOLTS)	ΔTMAX (°C)	DIM A (mm)	DIM B (mm)	DIM C (mm)	DIM D (mm)
PT4,7,F2,3030,TA,W6	18	3.8	8.1	67	30	30	34	4.1
PT6,7,F2,3030,TA,W6	29	6	8.1	65	30	30	34	3.8
PT4,12,F2,4040,TA,W6	32	3.7	14.4	67	40	40	44	4.1
PT4,12,F2,3030,TA,W6	33	3.9	14.4	65	30	30	34	3.2
PT6,12,F2,4040,TA,W6	52	6	14.4	65	40	40	44	3.8
PT8,12,F2,4040,TA,W6	72	8.5	14.4	64	40	40	44	3.3