

BCD Series


Rotary Code Switches



SPECIFICATIONS

- Operating voltage: 24VDC max.
- Switching current: 100mA max.
- Carrying current: 500mA max.
- Contact resistance: 100m Ω max.
- Insulation resistance: 1,000M Ω max.
- Dielectric Strength: 300VAC for 1 minute.
- Operation temperature: -10°C to 70 °C.
- Soldering temperature: 250 ± 5°C for 5 second.
- Life :10,000 step operations min.

HOW TO ORDER

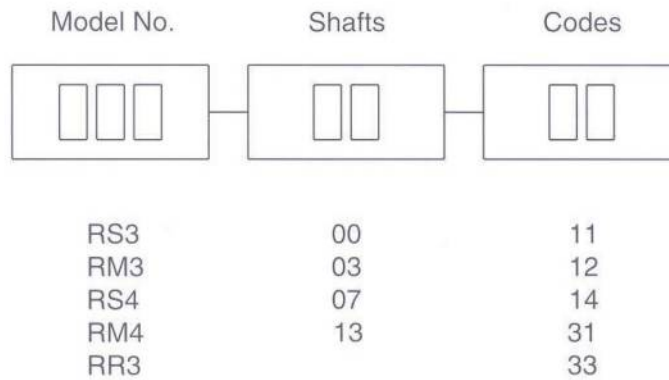

CODE NO : 11
BCD 8
POSITION

Position	Commen C-Contacted			
	1	2	4	C
0				●
1	●			●
2		●		●
3	●	●		●
4			●	●
5	●		●	●
6		●	●	●
7	●	●	●	●

CODE NO : 12
BCD 10
POSITION

Position	Commen C-Contacted				
	1	2	4	8	C
0					●
1	●				●
2		●			●
3	●	●			●
4			●		●
5	●		●		●
6		●	●		●
7	●	●	●		●
8			●	●	●
9	●			●	●

CODE NO : 14
BCD 16
POSITION

Position	Commen C-Contacted				
	1	2	4	8	C
0					●
1	●				●
2		●			●
3	●	●			●
4			●		●
5	●		●		●
6		●	●		●
7	●	●	●		●
8			●	●	●
9	●			●	●
A	●		●	●	●
B	●	●	●		●
C			●	●	●
D	●		●	●	●
E	●	●	●	●	●
F	●	●	●	●	●

CODE NO : 31
BCD
COMPLEMENT
10 POSITON

Position	Commen C-Contacted				
	1	2	4	8	C
0	●	●	●	●	●
1		●	●	●	●
2	●		●	●	●
3			●	●	●
4	●	●		●	●
5		●		●	●
6	●		●	●	●
7			●	●	●
8	●	●	●		●
9		●	●	●	●

CODE NO : 33
BCD
COMPLEMENT
16 POSITON




Position	Commen C-Contacted				
	1	2	4	8	C
0	●	●	●	●	●
1		●	●	●	●
2	●		●	●	●
3			●	●	●
4	●	●		●	●
5		●		●	●
6	●		●	●	●
7			●	●	●
8	●	●	●		●
9		●	●	●	●
A	●		●	●	●
B		●	●		●
C	●	●		●	●
D			●	●	●
E	●		●	●	●
F		●	●	●	●

BCD Series



Rotary Code Switches





RS300 XX
CODES

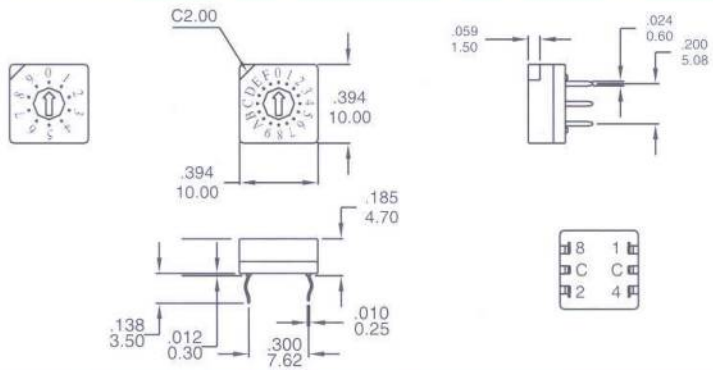

RS303 XX
CODES

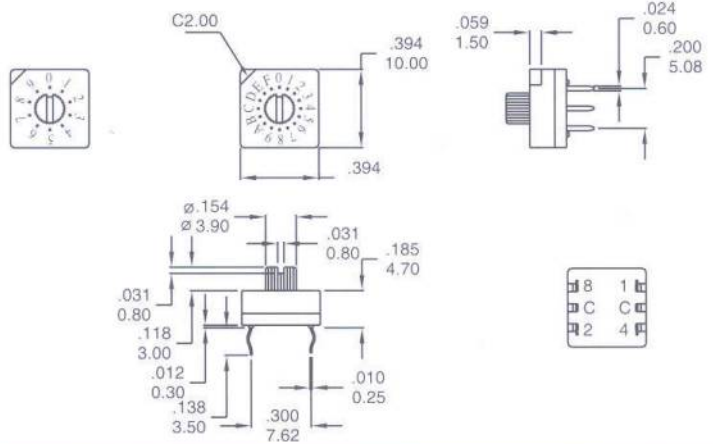

RS307 XX
CODES

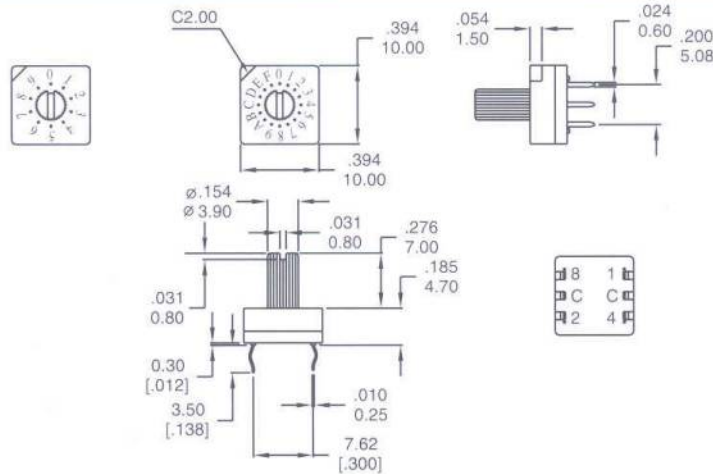

RS313 XX
CODES

