

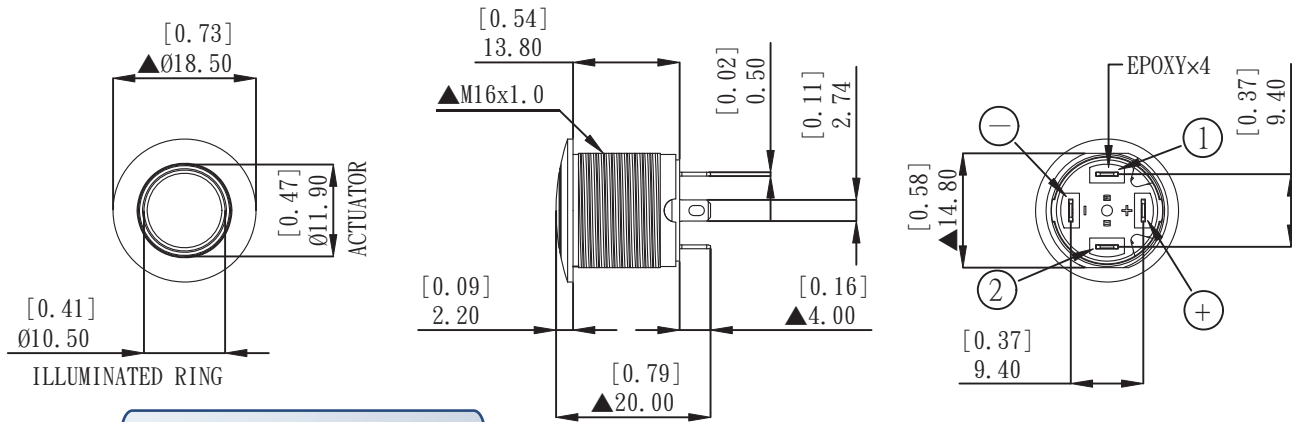
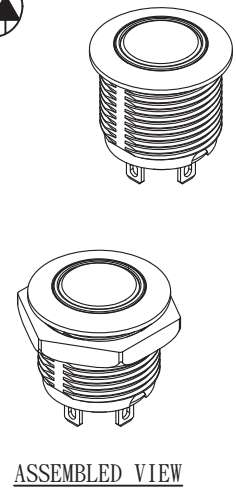


MPB16-XXRE-X-XR-XV

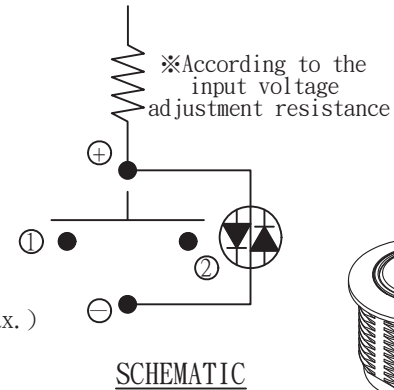

Body type & color		Button type	Light type	LED color	Accessories
CA	AL alloy Natural Anodized				
CB	AL alloy Black Anodized		E	Ring	0 Without Resistance
				0	Without Resistance
				1	White
				3	Red
				6	Green
				7	Blue
				Q	Silver
				R	Gold
				J	Solder terminal
				T1	Flying lead terminal L=500mm

僅供參考

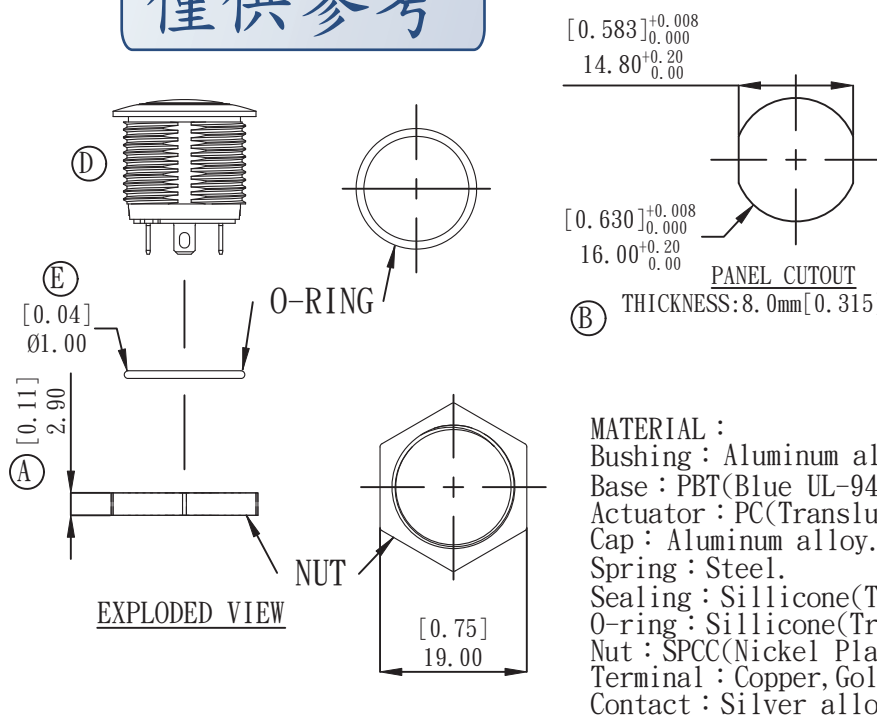

MATERIAL :
 Bushing : Aluminum alloy.
 Base : PBT(Blue UL-94V0).
 Actuator : PC(Translucent UL-94V2).
 Cap : Aluminum alloy.
 Spring : Steel.
 Sealing : Sillicone(Translucent).
 O-ring : Sillicone(Translucent).
 Nut : SPCC(Nickel Plated).
 Terminal : Copper, Gold Plated.
 Contact : Silver alloy.

- Specifications :
- Dimensions Unit : mm[inch].
 - Rating : 2A/36VDC.
 - Electrical Life : 200,000 Make-And-Break Cycles At Full Load.
 - Mechanical Life : 1,000,000 Cycles.
 - Insulation Resistance : 1,000MΩ Min. at 500VDC.
 - Delectric Strength : 2,000V RMS@sea level.
 - Contact Resistance : 50mΩ Max. @1A/12VDC(initial value).
 - Operation Pressure : -20~+70°C.
 - Travel : About 2.0mm.
 - Operation Pressure : 4.5N±1.5N. (C)
 - Ingress Protection : IP67.
 - Torque : 11.5 kgf · cm. (A)
 - Current limiting resistor is required to limit LED forward current to 20mA.

德利威電子股份有限公司 DAILYWELL ELECTRONICS CO.,LTD.

符號	原尺寸	修改後尺寸	變更日期	SCALE(比例): 1:1 TOLERANCE (公差): 0.00 mm ± 0.25mm 0.0 mm ± 0.40mm ANGULAR: ± 5° FILE NAME : TEST-0986	TITLE 圖名	MPB16 系列成品圖			SIZE 圖紙	A4
1	(A)	規範修訂	MAY-13-2015		DWG NO. 圖號	TEST-0986			UNIT 單位	inch mm
2	(B)	Panel cutout尺寸修正	MAY-27-2015		REV. 版本	R08	DATE 日期	MAY - 04 - 2015	SHEET 張數	1 of 1
3	(C)	Operation Pressure原4~6N修正為4.5N±1.5N	MAY-27-2015		CHECKED BY 審核	RICHARD			DRAWN BY 製圖	林昆鴻
4	(D)	設變定位邊位置	JUN-03-2015							
5	(E)	O-ring直徑原1.50設變1.00	JUL-01-2015							