


ORDER INFORMATION


2 5 4 8 A - X X

Standard Recommend


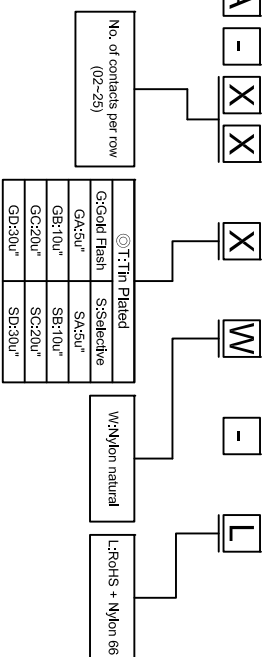


SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 5000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66, UL94V-2

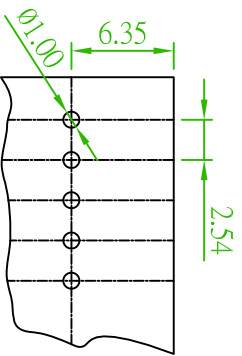


Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

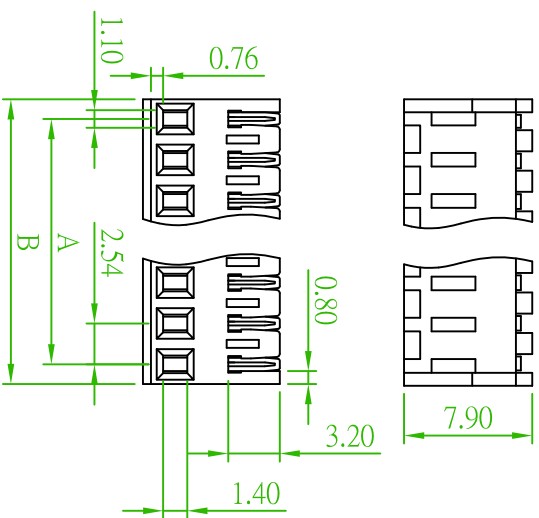

Dimensional Information

Circuits	Dim.± 0.20	Dim.± 0.25	Circuits	Dim.± 0.20	Dim.± 0.25	Circuits	Dim.± 0.20	Dim.± 0.25	Circuits	Dim.± 0.20	Dim.± 0.25	Circuits	Dim.± 0.20	Dim.± 0.25
2	140	270	3	300	340	4	300	340	5	400	470	6	400	570
	254	508		508	762		762	1016		1016	1270		1270	1914
6	500	600	7	600	700	8	700	800	9	800	900	10	900	1000
	1270	1524		1524	1778		1778	2032		2032	2286		2286	2540
10	500	1000	11	2540	1100	12	1100	1300	13	1300	1500	14	1500	1700
	2286	2540		2540	2794		2794	3048		3048	3302		3302	3556
14	1300	1400	15	1400	1500	16	1500	1600	17	1600	1700	18	1700	1800
	3302	3556		3556	3810		3810	4064		4064	4318		4318	4572
18	4118	4572	19	4572	4826	20	4826	5080	21	5080	5334	22	5334	5588
	2100	2200		2200	2300		2300	2400		2400	2500		2500	2600
	53.34	55.88		55.88	58.42		58.42	60.96		60.96	63.50		63.50	66.04

AREA	REV.	DESCRIPTION	DATE



Amitek
Technology Co., Ltd.

耀德企業有限公司
Amitek Technology Co., Ltd.
TEL: 886-2-2968-8055
FAX: 886-2-2968-8055

品名		2.54mm WAFER	
品號		2548A-XX-L	
圖號	版本	繪圖	日期
2548A-XX-L	A	Kent	03/27/2006
客戶品號	比例	核對	核對
CUSTOMER P/N	SCALE	CHECKED	CHECKED
	FREE	Paul	Paul
公差	單位	核准	核准
TOLERANCE	UNIT	APPROVED	APPROVED
X ±0.35	mm	James	James
.XX ±0.25			

