

CONNECTORS MANUFACTURER





DIN 41612 Long Body Q Type Male

Specifications

Current Rate:2 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:30mΩ Max.
 Dielectric Voltage:1000V AC for one minute
 Operation Temperature:-55°C to +105°C

Material

Insulator:Polyester,UL 94V-0
 ◎Standard:PBT
 Terminal:Copper Alloy
 Plating:Selective Gold Plating

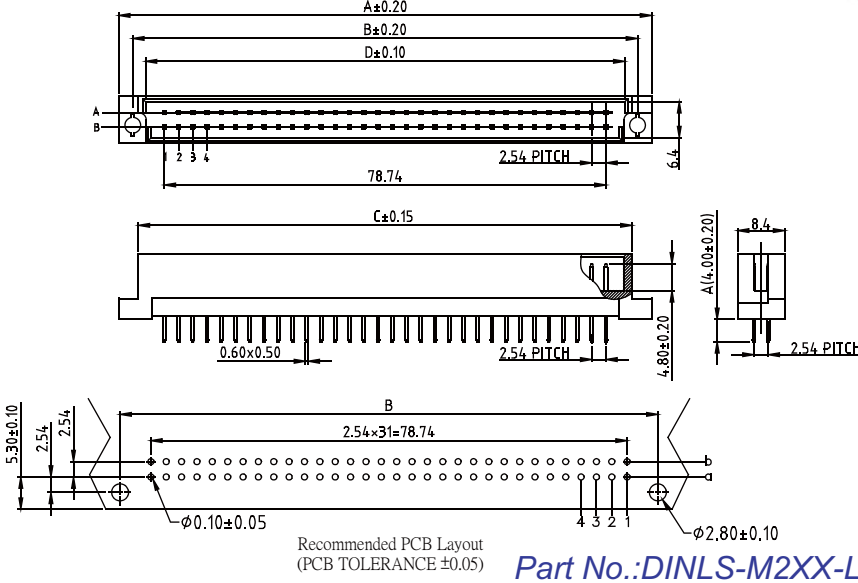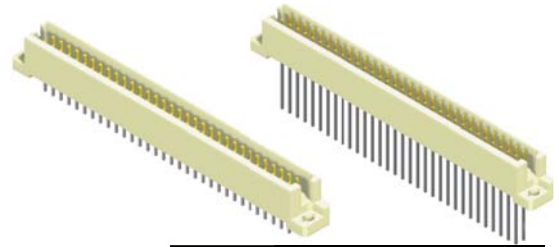

Dimension				
No. of Contacts	A	B	C	D
64/32/16	95,0	90,0	88,0	85,45
44/22/11	69,6	64,6	62,6	60,05
Pitch	No. of Contacts	Rows with Contacts	Contact Arrange	
2.54	64	A B		
	32	A -		
	44	A B		
5.08	22	A -		
	32	A B		
	16	A -		
	22	A B		
	11	A -		



DIN 41612 Long Body Q Type Female

Specifications

Current Rate:2 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:30mΩ Max.
 Dielectric Voltage:1000V AC for one minute
 Operation Temperature:-55°C to +105°C


Material

Insulator:Polyester,UL 94V-0
 ◎Standard:PBT
 Terminal:Copper Alloy
 Plating:Selective Gold Plating

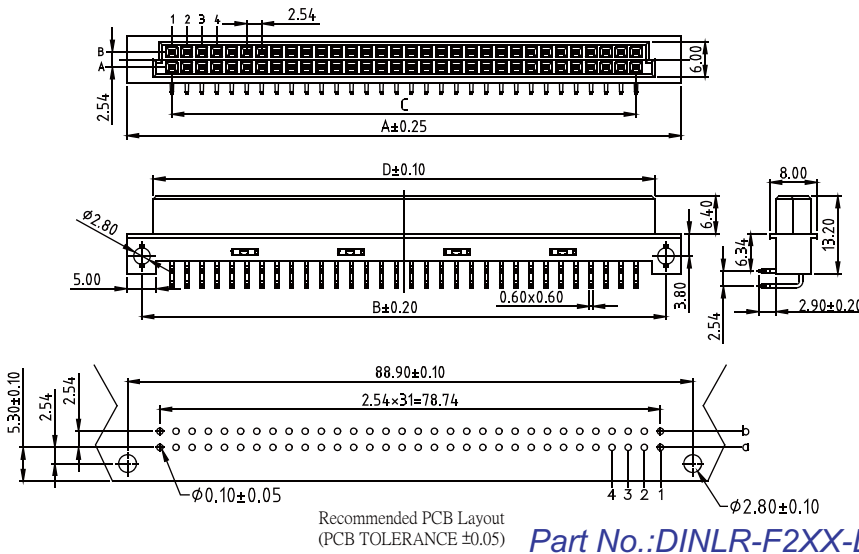

Dimension				
No. of Contacts	A	B	C	D
64/32/16	94,05	88,90	78,74	85,05
44/22/11	68,65	63,50	53,34	59,65
Pitch	No. of Contacts	Rows with Contacts	Contact Arrange	
2.54	64	A B		
	32	A -		
	44	A B		
5.08	22	A -		
	32	A B		
	16	A -		
	22	A B		
	11	A -		

ORDER INFORMATION

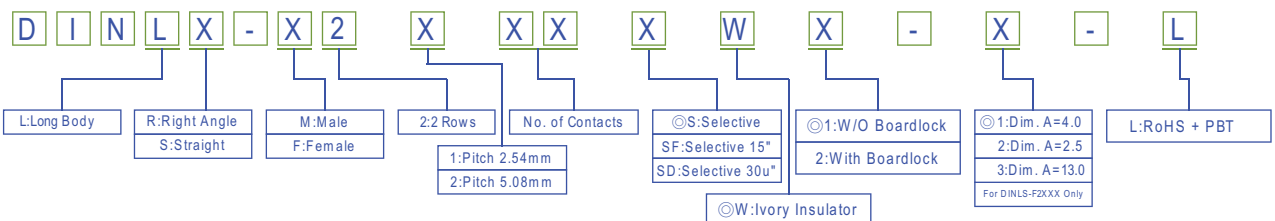

DIN 41612 Conn. Series

RoHS

CONNECTORS MANUFACTURE