

CONNECTORS MANUFACTURER





DIN 41612 Long Body C Type Male

Specifications

Current Rate: 2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 30mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C

Material

Insulator: Polyester, UL 94V-0
 ©Standard: PBT
 Terminal: Copper Alloy
 Plating: Selective Gold Plating

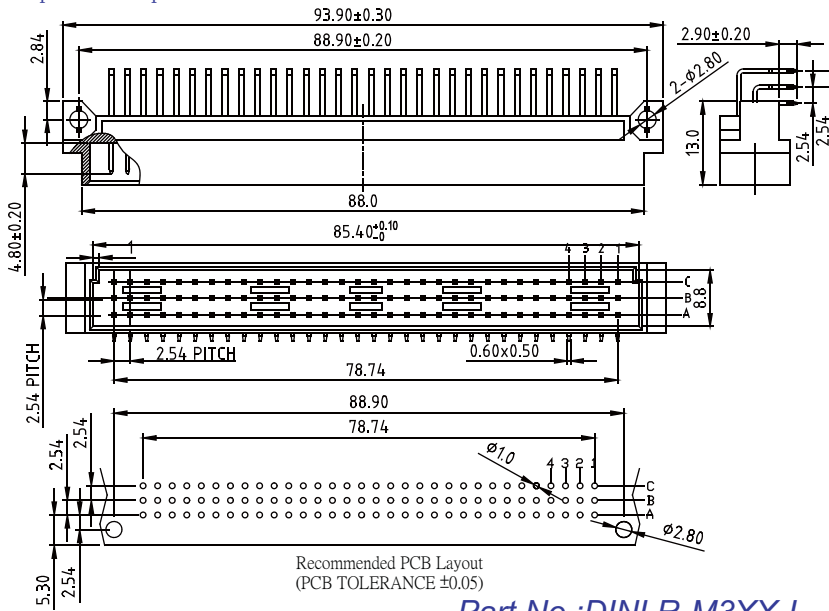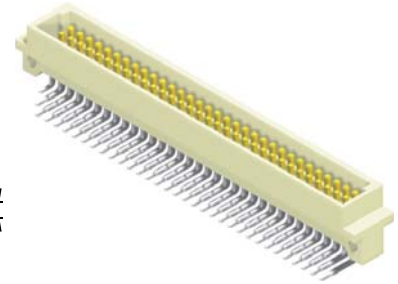

Pitch	No. of Contacts	Rows with Contacts	Contact Arrange
2.54mm	96	A B C	
	64A	A - C	
	64B	A B -	
	32	A - -	
5.08mm	48	A B C	
	32A	A - C	
	32B	A B -	
	16	A - -	



DIN 41612 Long Body C Type Female

Specifications

Current Rate: 2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 30mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C


Material

Insulator: Polyester, UL 94V-0
 ©Standard: PBT
 Terminal: Copper Alloy
 Plating: Selective Gold Plating

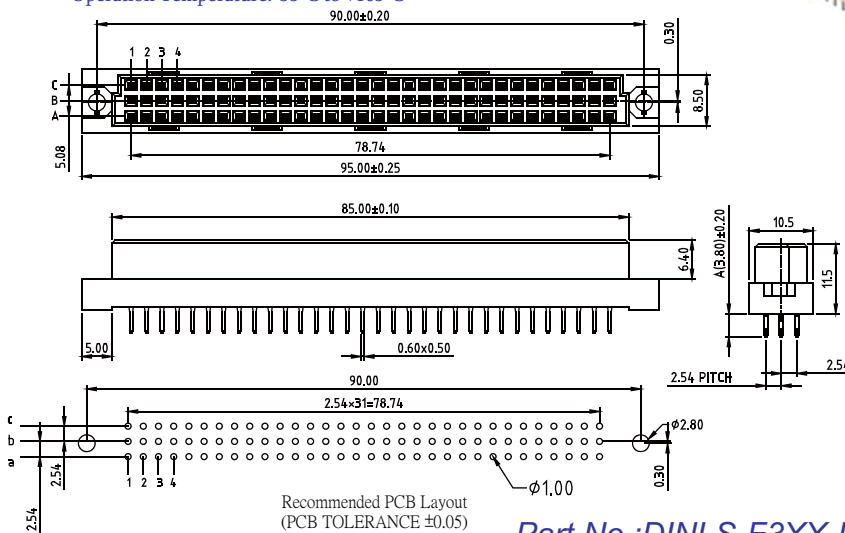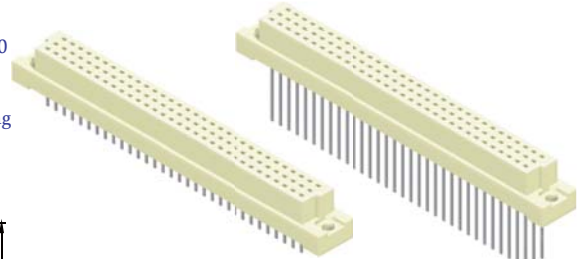

Pitch	No. of Contacts	Rows with Contacts	Contact Arrange
2.54	96	A B C	
	64A	A - C	
	64B	A B -	
	32	A - -	
5.08	48	A B C	
	32A	A - C	
	32B	A B -	
	16	A - -	

ORDER INFORMATION

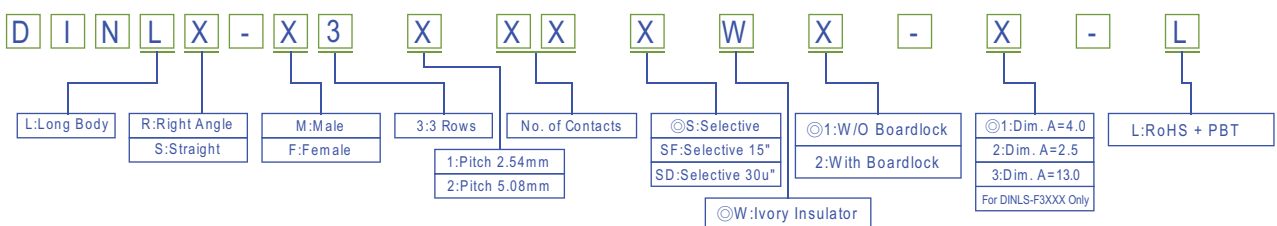

DIN 41612 Conn. Series

RoHS

CONNECTORS MANUFACTURER