



DIN 41612 Short Body C Type Male

Specifications

Current Rate: 2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 30mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C

Material

Insulator: Polyester, UL 94V-0
 ©Standard: PBT
 Terminal: Copper Alloy
 Plating: Selective Gold Plating

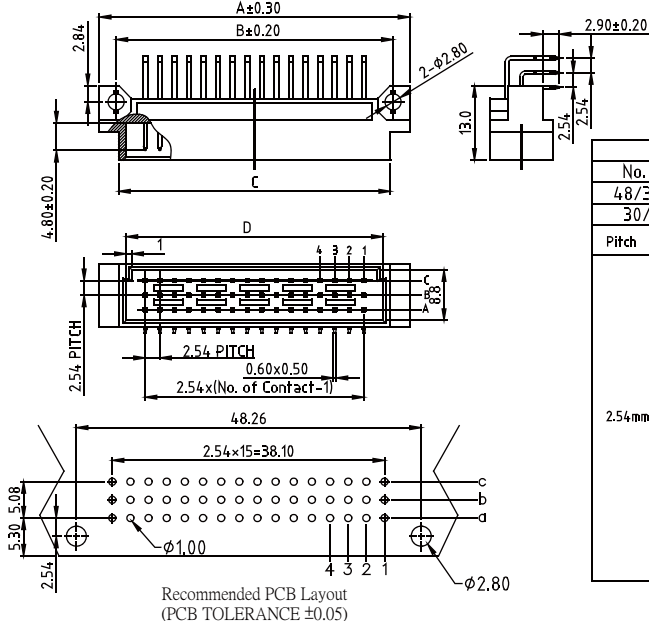

Dimension											
No. of Contacts		A	B	C	D						
48/32/24/16/10/8		54.00	48.26	47.40	44.60						
30/20/15/10/5		38.92	33.02	32.12	29.52						
Pitch	No. of Contacts	Rows with Contacts	Contact Arrange	Pitch	No. of Contacts	Rows with Contacts	Contact Arrange				
								48	A B C	24	A B C
								32A	A - C	16A	A - C
								32B	A B -	16B	A B -
								30	A B C	15	A B C
								20	A B -	10	A - C
								20	A - C	10	A B -
								16	A - -	5	A - -
10	A - -	8	A - -								

Part No.: DINSR-M3XX-L



DIN 41612 Short Body C Type Female

Specifications

Current Rate: 2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 30mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C

Material

Insulator: Polyester, UL 94V-0
 ©Standard: PBT
 Terminal: Copper Alloy
 Plating: Selective Gold Plating

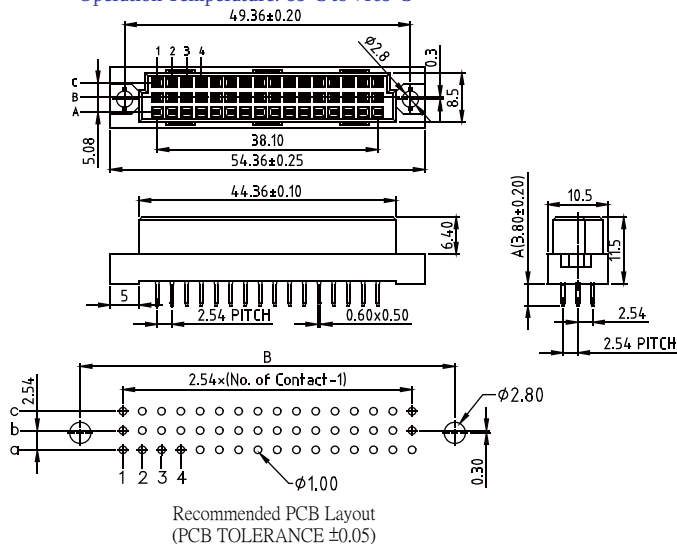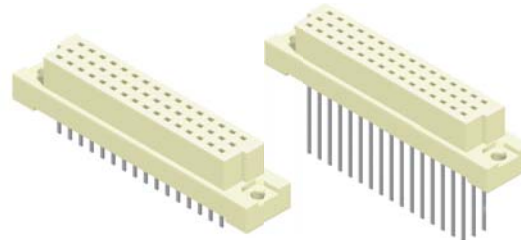

Dimension											
No. of Contacts		A	B	C							
48/32/24/16/10/8		54.36	49.36	44.36							
30/20/15/10/5		38.92	33.02	32.12							
Pitch	No. of Contacts	Rows with Contacts	Contact Arrange	Pitch	No. of Contacts	Rows with Contacts	Contact Arrange				
								48	A B C	24	A B C
								32A	A - C	16A	A - C
								32B	A B -	16B	A B -
								30	A B C	15	A B C
								20	A - C	10	A - C
								20	A B -	10	A B -
								16	A - -	8	A - -
10	A - -	5	A - -								

Part No.: DINSS-F3XX-L

ORDER INFORMATION

