
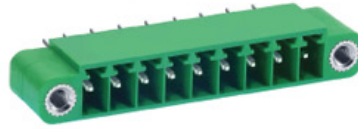


# ME 060-350 Header with flanges

Pitch: 3.50mm(0.138inch)




## SPECIFICATIONS

			CUL	VDE
負載電壓	Rated Voltage	Bemessungsspannung	AC 150V	AC 300V
負載電流	Rated Current	Bemessungsstrom	12A	10A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)	
焊針	Solder Pin	Lötstift	□0.8mm, Brass, Tin plated	
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C	
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.3mm	
UL File No.	E167040			

TABLE

Item No.	A(mm)	A(inch)
ME060-35002	17.4	0.685
ME060-35003	20.9	0.823
ME060-35004	24.4	0.961
ME060-35005	27.9	1.098
ME060-35006	31.4	1.236
ME060-35007	34.9	1.374
ME060-35008	38.4	1.512
ME060-35009	41.9	1.650
ME060-35010	45.4	1.787
ME060-35011	48.9	1.925
ME060-35012	52.4	2.063
ME060-35013	55.9	2.201
ME060-35014	59.4	2.339
ME060-35015	62.9	2.476
ME060-35016	66.4	2.614
ME060-35017	69.9	2.752
ME060-35018	73.4	2.890
ME060-35019	76.9	3.028
ME060-35020	80.4	3.165
ME060-35021	83.9	3.303
ME060-35022	87.4	3.441
ME060-35023	90.9	3.579
ME060-35012	94.4	3.717

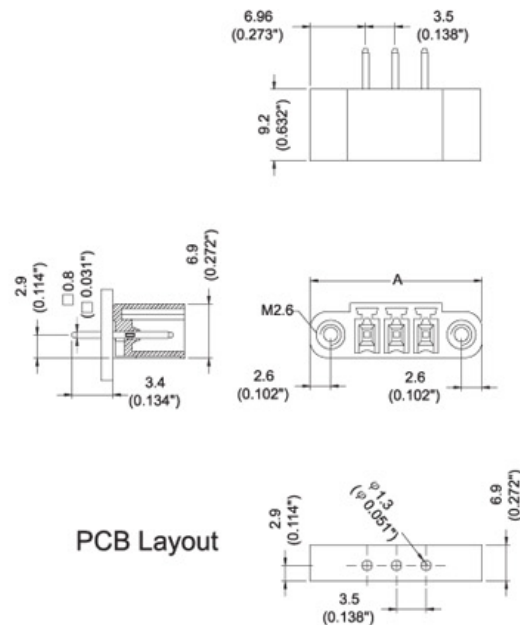

PCB Layout