


ME 060-381 Header with flanges



Pitch: 3.81mm(0.150inch)




SPECIFICATIONS

			CUL	VDE
負載電壓	Rated Voltage	Bemessungsspannung	AC 300V	AC 300V
負載電流	Rated Current	Bemessungsstrom	12A	10A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)	
焊針	Solder Pin	Lötstift	□0.8mm, Brass, Tin plated	
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C	
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.3mm	
UL File No.	E167040			

TABLE

Item No.	A(mm)	A(inch)
ME060-38102	18.0	0.709
ME060-38103	21.8	0.859
ME050-38104	25.6	1.009
ME060-38105	29.5	1.159
ME060-38106	33.3	1.309
ME060-38107	37.1	1.459
ME060-38108	40.9	1.609
ME060-38109	44.7	1.759
ME060-38110	48.5	1.909
ME060-38111	52.3	2.059
ME060-38112	56.1	2.209
ME060-38113	59.9	2.359
ME060-38114	63.7	2.509
ME060-38115	67.6	2.659
ME060-38116	71.4	2.809
ME060-38117	75.2	2.959
ME060-38118	79.0	3.109
ME060-38119	82.8	3.259
ME060-38120	86.6	3.409
ME060-38121	90.4	3.559
ME060-38122	94.2	3.709
ME060-38123	98.0	3.859
ME060-38124	101.8	4.009

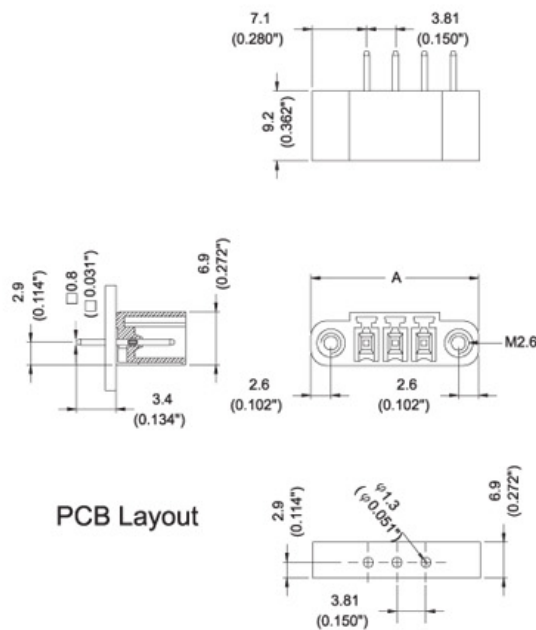

PCB Layout