

Pitch: 2.54mm(0.100inch)

- Description :
- Pitch : 2.54 mm (0.100 inch)





SPECIFICATIONS

		CUL		VDE
負載電壓	Rated Voltage	Bemessungsspannung	AC 150V	AC 130V
負載電流	Rated Current	Bemessungsstrom	4A	6A
電線線徑	Wire Size	Leitergrößen	28~20AWG	0.2~0.5mm ²
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)	
端子	Terminal	Stiftmaterial	Brass, Tin plated	
夾片	Spring	Feder	Stainless strip steel	
壓片、端蓋	Lever,Cover	Hebel, Deckel	Polyamide66(UL94V-0)	
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C	
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.3mm	
UL File No.	E167040			

TABLE

Item No.	A(mm)	A(inch)
MWX101-25402	6.6	0.259
MWX101-25403	9.1	0.359
MWX101-25404	11.7	0.459
MWX101-25405	14.2	0.559
MWX101-25406	16.7	0.659
MWX101-25407	19.3	0.759
MWX101-25408	21.8	0.859
MWX101-25409	24.4	0.959
MWX101-25410	26.9	1.059
MWX101-25411	29.4	1.159
MWX101-25412	32.0	1.259
MWX101-25413	34.5	1.359
MWX101-25414	37.1	1.459
MWX101-25415	39.6	1.559
MWX101-25416	42.1	1.659
MWX101-25417	44.7	1.759
MWX101-25418	47.2	1.859
MWX101-25419	49.8	1.959
MWX101-25420	52.3	2.059
MWX101-25421	54.8	2.159
MWX101-25422	57.4	2.259
MWX101-25423	59.9	2.359
MWX101-25424	62.5	2.459

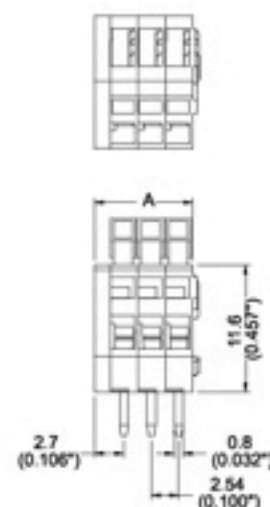

PCB Layout

