

OMC121-508 Pluggable terminal block with flanges **DECA**

Pitch: 5.08mm(0.200inch)





SPECIFICATIONS

			CUL	VDE
負載電壓	Rated Voltage	Bemessungsspannung		
負載電流	Rated Current	Bemessungsstrom		
電線線徑	Wire Size	Leitergrößen	24~12AWG	0.2~3.3mm ²
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)	
押線圈	Cage Clamp	Klemmkörper	Brass, Ni plated	
導電夾片	Contact	Kontakt	Brass, Tin plated	
螺絲	Screw Size	Schraubengewinde	M2.6, steel, Zinc plated	
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C	
扭力	Torque	Anzugsmoment	4.5 lb-inch	

TABLE

Item No.	A(mm)	A(inch)
OMC121-50802	31.24	1.229
OMC121-50803	36.32	1.429
OMC121-50804	41.40	1.629
OMC121-50805	46.48	1.829
OMC121-50806	51.56	2.029
OMC121-50807	56.64	2.229
OMC121-50808	61.72	2.429
OMC121-50809	66.80	2.629
OMC121-50810	71.88	2.829
OMC121-50811	76.96	3.029
OMC121-50812	82.04	3.229
OMC121-50813	87.12	3.429
OMC121-50814	92.20	3.629
OMC121-50815	97.28	3.829
OMC121-50816	102.36	4.029
OMC121-50817	107.44	4.229
OMC121-50818	112.52	4.429
OMC121-50819	117.60	4.629
OMC121-50820	122.68	4.829

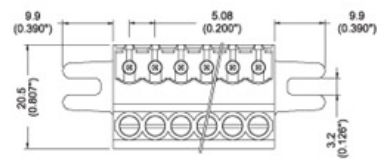

Note:
Screw Plating: Changes are available upon request
Cage Clamp: OMC 100#: Steel