


RoHS compliant

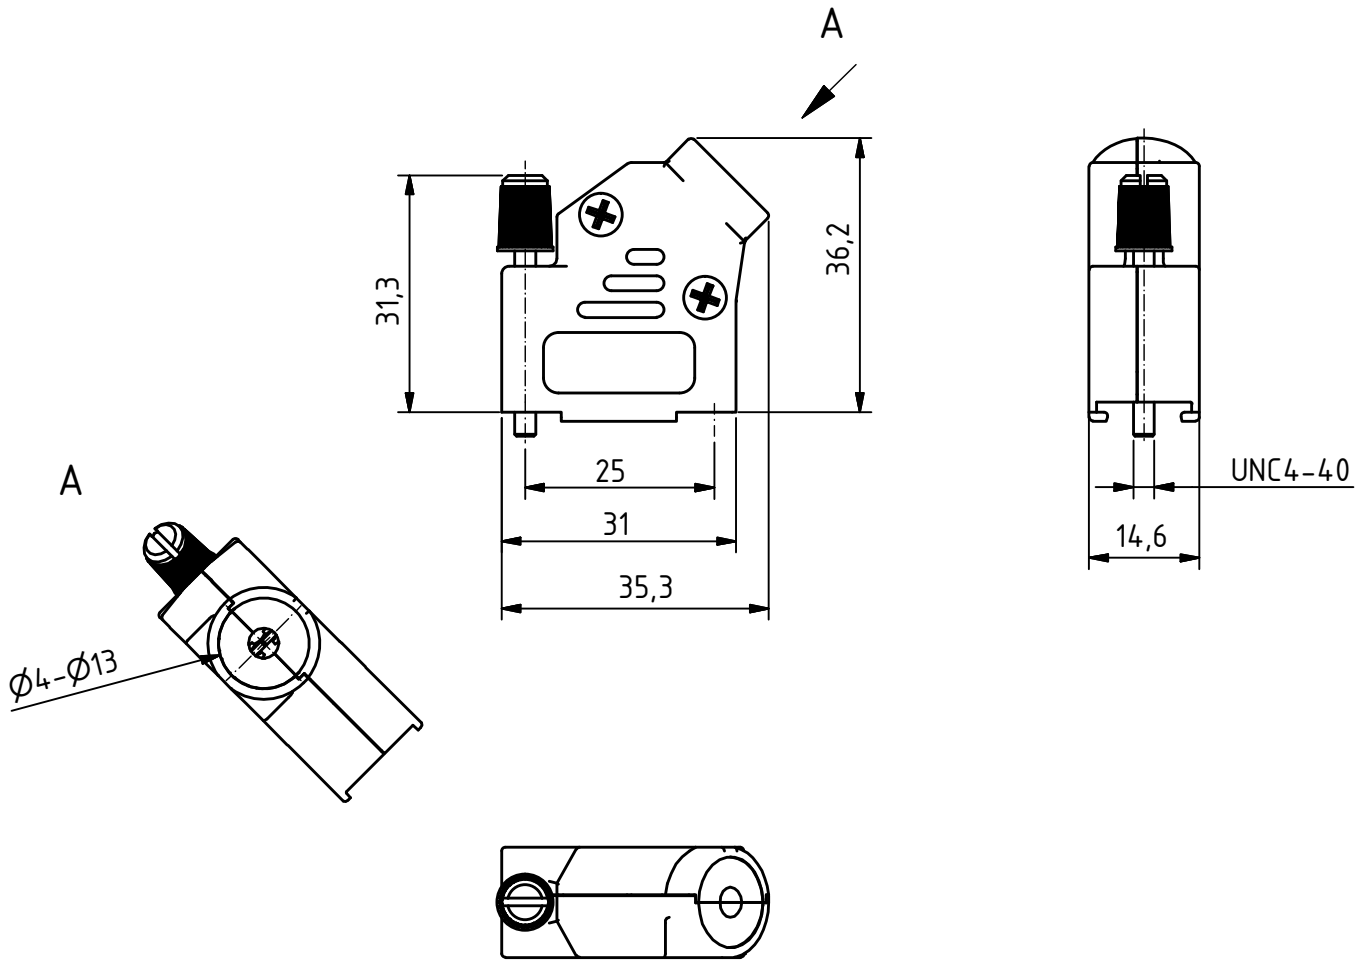


MATERIALS

- Hood: Zinc die-cast, nickel plated

CHARACTERISTICS

- With jack screw
- With strainrelief
- Temperature range -40°C to +120°C
- Cable diameter, 4 mm to 13 mm
- Attenuation better than 40 db, over range 30 MHz to 1 GHz
- Set packed in bag



General tolerances (Deltron standard)			
size in mm	> 0.5 up to 3	> 3 up to 6	> 6 up to 30
tolerances	±0.1	±0.2	±0.3

modification	Rev.	Rev.	Rev.	DE008976 part no.			
	Rev.	Rev.	Rev.				
DVMA09UN4-OS-Plastic Cap				1:1 scale	drawn	13.02.2014	mw
					checked		
					approved		
 CONNECT 2 CUSTOMIZE				Industrie Neuhof 8c CH-3422 Kirchberg www.d-sub.swiss			K060659
							drawing no.