



P/N	L1±T	L2
4009NC4000-0170	170±10	
4009NC4000-010K	10000±5%	



P1	WIRE COLOR	
1	GRAY	
2	WHITE	
3	BLUE	
4	BROWN	
FE	Black	

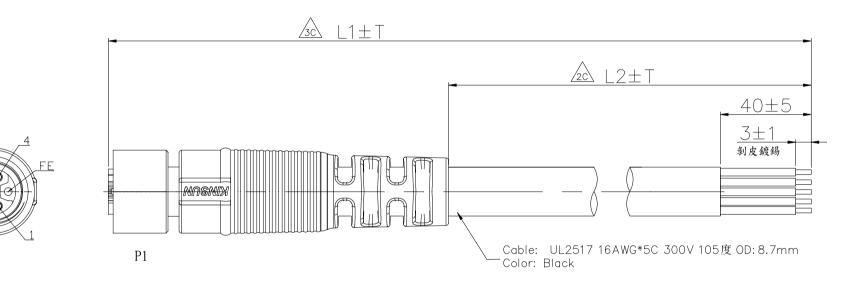

NOTES:

1.Current Rating: 16A 2.Rated voltage: 63V

M12\*1.0

4C\

3.Insulation Resistance: 100 Megaohm min.

MATERIALS:

PLASTIC HOUSING: ENGINEERING THERMOPLASTIC

FLAMMABILITY RATING UL 94V-0. COLOR BLACK

CONTACTS: COPPER ALLOY

PLATING: GOLD PLATING OVER NICKEL IN CONTACT.

O-RING: EPDM RUBBER COLOR: Black

COUPLING NUT: M12\*P1.0 BRASS WITH NICKEL PLATED

設計DR. Jessica 2023,06.28	核准MPD. Marco 2023.06.28	容許公差 .XXX .XX	TOLERANCE ±0.10 ±0.25 ±0.38	品名 ARTICLE	M12 L CODE Female 4+FE Straight cable
版本說明 依E302—2304(	REVISION NOTE D63新增10M規格	X ANG	±0.50 ±3°	圖號 DWG NO.	4009NC4000-0170
$\bigcirc$ K	<u>INSUN</u>			單位 UNIT mm	比例 SCALE 張數 SHEET 版本 REV. 2/1 1/1 B