




Waterproof Connectors (M8 Female Cable Side) (IP68)

KINSUN

CONTACT ARRANGEMENT FRONT VIEW		
	4P	3P

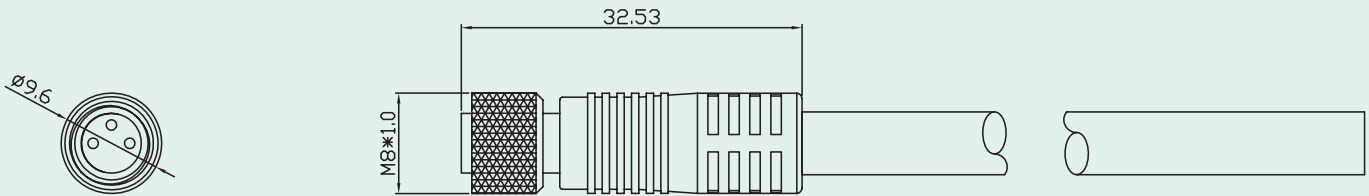

Materials

- **Plastic Housing** : Engineering Thermoplastic
Flammability Rating UL 94V-0.
- **Contacts** : Copper Alloy.
- **Plating** : Gold Plating Over Nickel In Contact.
- **O-Ring** : Silicone Rubber Black Color.
- **Shield** : Brass With Nickel Plated.
- **Coupling Nut** : M8*1 Brass With Nickel Plated.
- **Cable** : UL 2464 22AWG, OD5.4mm, Color Black.



Ratings and Characteristics

- **Current Rating** : 3A(3Pin)
3A(4Pin)
- **Rated Voltage** : 60V AC/DC(3Pin)
30V AC/DC(4Pin)
- **Insulation Resistance** : $10^8 \Omega$ Min

Ordering Information

