




USB 2.0 Cable Assembly

KINSUN

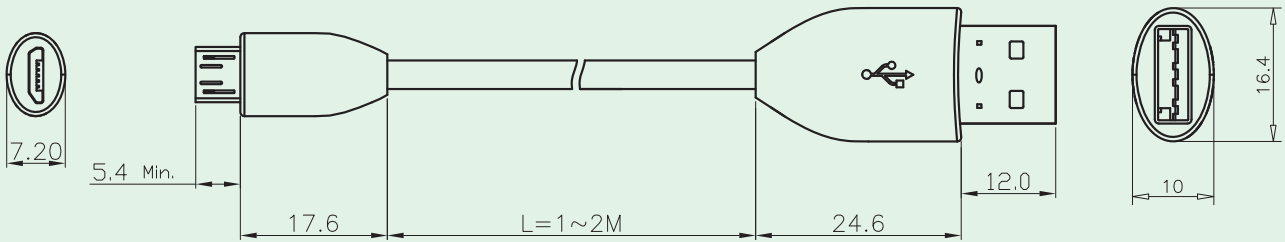

ELECTRIC TEST :
 Voltage: DC300V
 Contact Resistance: 2.0 OHMS MAX.
 Insulation Resistance: 5 MEGA OHMS MIN.
 Differential impedance: 90 OHMS ±10%

Pin-Assignment		
USB Std. A		Micro USB B
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	5
Shell	Drain+Braid	Shell

Materials

USB AM2.0 TO MicroUSB BM2.0

- **MATERIALS & FINISH:**
- **OVERMOLD** : 45P TPE,Black.
- **USB CONN** : USB AM2.0,WHITE,GOLD PLATED G/F.
- **CABLE** : UL21100 28AWG OD=3.5MM,BLACK.
- **Micro USB CONN**: MicroUSB BM2.0,BLACK,COLD PLATED G/F.



Ordering Information

6170 Series