

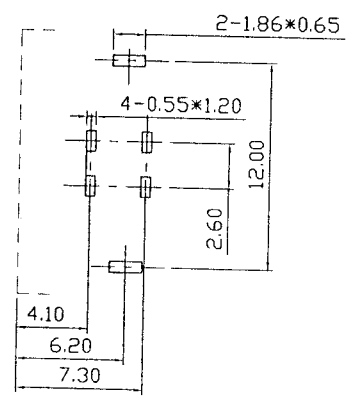
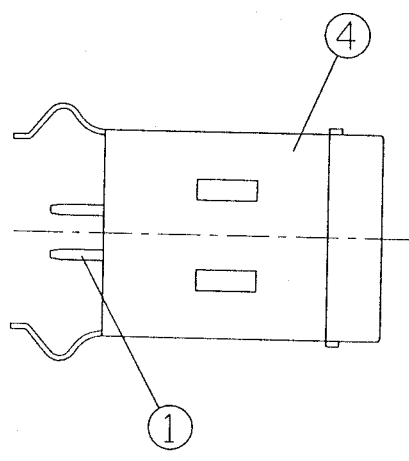

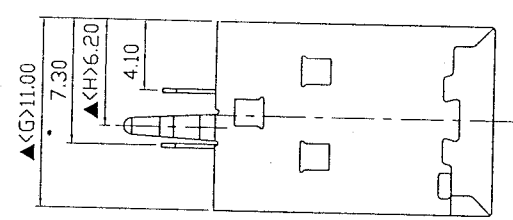


A B C D E

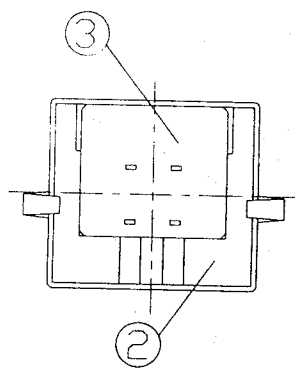

Pin Hole Layout
(Jack Bottom View)

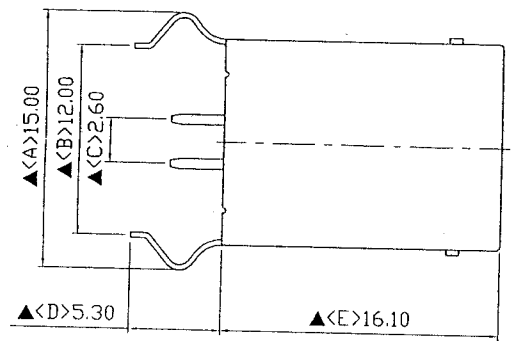

1	Shell	0.3T Brass	1	Nickel Plated
2	Cover	PBT UL94-V0	1	White Color
3	Housing	PBT UL94-V0	1	White Color
4	Terminal	0.25T Brass	4	Gold flash Over 50" (min) Nickel Tin Lead
NO.	Description	Material	Q'TY	Finish

SPECIFICATIONS:
See "Details of Environment-Related Substance"
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

S.C.PRECISION INDUSTRIAL CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
	04.15.2004	余軍			

PART NAME : MINI USB B TYPE SOCKET CONNECTOR PART NUMBER: SCU201SFN0W0000 VERSION: 4.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED UNIT: mm SCALE: 1/1

A B C D E