


5262




SMT Kompakt-Anschlussklemmen RM 3mm – stehend SMT Compact Terminal Blocks 3mm Pitch – vertical

Technische Daten / Technical Data




Isolierkörper	Thermoplast, nach UL94 V-0
Insulator	Thermoplastic, rated UL94 V-0
Farbe	Weiß
Colour	White
Kontaktmaterial	Kupferlegierung
Contact Material	Copper alloy
Aderquerschnitt	AWG 24 ~ 22
Applicable wire Gauge	AWG 24 ~ 22
Durchgangswiderstand	< 20 mΩ
Contact Resistance	< 20 mΩ
Isolationswiderstand	> 1000 MΩ
Insulation Resistance	> 1000 MΩ
Spannungsfestigkeit	1 kV AC
Test Voltage	1 kV AC
Nennstrom	5 A
Current Rating	5 A
Temperaturbereich	-40 °C ... +105 °C
Temperature Range	-40 °C ... +105 °C
Verarbeitung	260 °C max. für 3-5s
Processing	260 °C max. for 3-5s

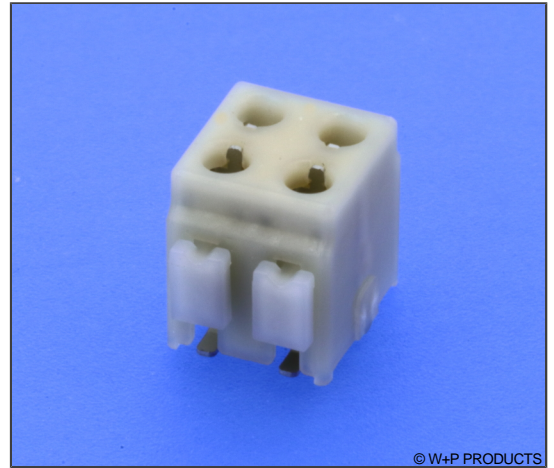

© W+P PRODUCTS



TOLERANCE: ±0.05
RECOMMENDED PCB LAYOUT
TOP VIEW



Series

5262

Contacts

04

04

Plating

50

50 Sn

Package

TR

TR Tape&Reel