



Rev	ECO	Description	Date	By
00		First revision	07/28/22	Jinlong

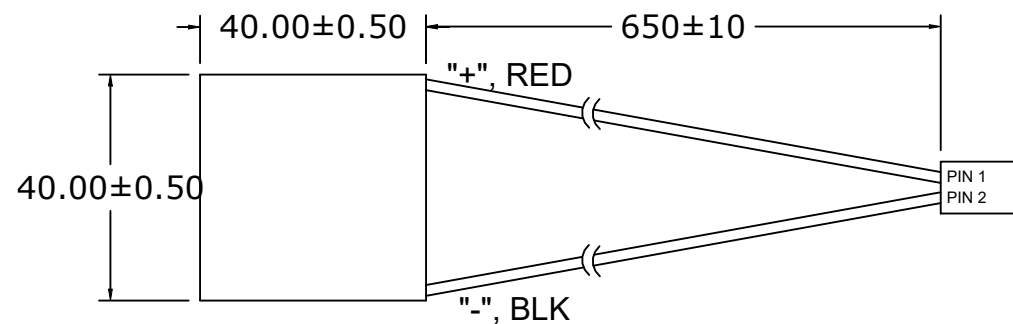

Ceramic Material: Alumina(Al_2O_3)
Solder Construction: 138°C BiSn

NOTES:

- Wire are UL1569, 22AWG, 17/34, PVC.
- Lapped both side, height is 3.90 ± 0.025 mm, flatness and parallel is 0.025mm.
- Sealant: epoxy.
- Printing 2D barcode at cold side.
- ACR: 3.085-3.428-3.770 ohms(23°C).
- Parts must be ROHS 2.0 & REACH compliant.

REFERENCE ONLY!	
Nominal Specs (@ 25°C)	
I _{max} (A)	6.0
U _{max} (V)	22.6
Q _{max} (W)	79
ΔT_{max} ($^\circ\text{C}$)	71

General tolerances: -		Third angle projection		Dimension units: Metric (mm)	Project
Designed by: Jinlong	Checked by:	Approved by:	Release date: 07/28/22	Drawing No: 387009803	
 THermal SYSTEMS Web: WWW.lairdthermal.com				Description: UTX6,19,F1,4040,TA,EP,W/CON	
				Part No: 387009803	
	F	G	H	I	K