
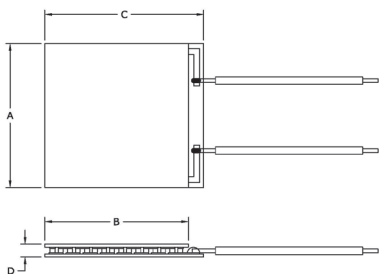


# Thermoelectric MODULES

## UltraTEC™

- High heat flux density
- High COP in low power input applications
- Ideal for industrial and medical laser systems and high powered projectors



PART NO.	QMAX <sup>(1)</sup> (WATTS)	IMAX (AMPS)	VMAX (VOLTS)	ΔTMAX (°C)	DIM A (mm)	DIM B (mm)	DIM C (mm)	DIM D (mm)
UT8,12,F2,2525,TA,W6	69	7.9	14.4	69	25	25	29	1.9
UT8,12,F2,3030,TA,W6	69	7.9	14.4	69	30	30	34	2.6
UT6,19,F1,4040,TA,W6	93	6	24.6	74	40	40	40	3.9
UT11,12,F2,3030,TA,W6	95	11	14.4	69	30	30	34	2.4
UT6,24,F1,5555,TA,W6	113	6	29.8	74	55	55	55	3.9
UT15,12,F2,4040,TA,W6	126	14.6	14.4	69	40	40	44	2.8
UT8,200,F2,4040,TA,W6	128	8.5	24.9	71	40	40	44	3.8
UT8,24,F1,5555,TA,W6	153	8.5	29.8	72	55	55	55	3.8
UT8,288,F2,5252,TA,W6	182	8.5	35.9	71	52	52	56	3.8
UT9,28,F2,4040,TA,W6	206	9.2	36.7	68	40	40	44	2.8
UT15,200,F2,4040,TA,W6	236	15.4	25	68	40	40	44	3.3
UT15,24,F2,5252,TA,W6	288	15.1	30.8	70	52	52	56	3.3
UT15,288,F2,5252,TA,W6	341	15.4	36	68	52	52	56	3.3