



52SMX

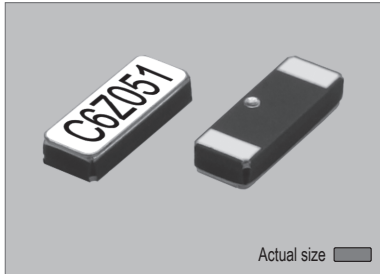


0.0257 gm (wt.)


52SMX




SOLDERING PATTERN



XY-CUT

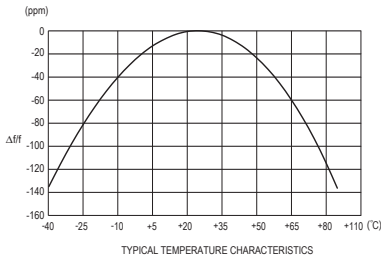

TAPE SPECIFICATIONS

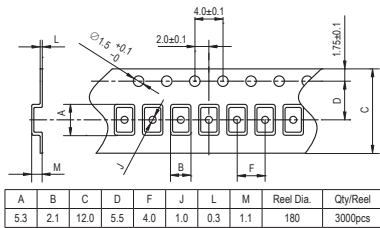

STANDARD SPECIFICATIONS

Item	Symbol	Specifications
Part number	P/N	52M327*
Package Type		52SMX
Nominal frequency	F	32.768 kHz
Frequency tolerance (at +25°C)	$\Delta f/F$	B : ± 20 ppm C : ± 30 ppm (Standard) D : ± 50 ppm
Load capacitance	CL	12.5 pF : 52M327 (Standard) 9.0 pF : 52M327-9 7.0 pF : 52M327-7
Equivalent series resistance	ESR	70k Ω max. (To : -40°C to +85°C)
Drive level	P	1 μ W max.
Turnover temperature	Tt	+25°C ± 5 °C
Temperature coefficient	β	-0.034 ppm / °C ² , Typical
Quality factor	Q	40000 min.
Shunt capacitance	C0	1.3 pF, Typical
Motional capacitance	C1	0.0021 pF, Typical
Capacitance ratio	γ	619, Typical
Aging (for first year)	$\Delta f/F$	± 3 ppm max. at +25°C ± 3 °C
Insulation resistance	Ri	500 M Ω min. at 100V DC ± 15 V
Cut		XY-Cut
Operating temperature range	To	-40°C to +85°C
Storage temperature range	Ts	-55°C to +125°C
Shock resistance	$\Delta f/F$	± 5 ppm max.
Vibration resistance	$\Delta f/F$	± 5 ppm max.
IR reflow resistance	$\Delta f/F$	± 10 ppm max.
Reflow condition		10 seconds max. at +250°C ± 10 °C

(*) No pattern path underneath the 52SMX

PACKAGE DATA

Item	Package	52SMX
Lid		Metal
Base		Ceramic
Sealing		AuSn
Terminal		Tungsten (metalized)
Terminal plating		Gold / Nickel (surface) / (under)
RoHS		Compliant (Pb-free)