


SURFACE MOUNT CERAMIC RESONATORS


Type: ZTACC-MG MHz Band, fo: 2.00~8.00 MHz

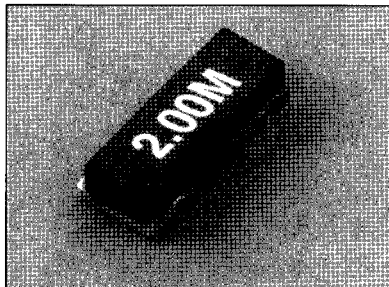

ZTACC-MG, FEATURES

- Ultra-Small True Surface Mountable.
- Can Be Re-Flow Soldered
- Available In Tape And Reel Packaging

STANDARD SPECIFICATION	Frequency Range
	2.00~8.00MHz
Frequency Accuracy	± 0.5%
Stability in Temperature (-20~+80 °C)	± 0.3%
Aging For Ten Years	± 0.3%
Load Capacitance (PF) C1	30
Load Capacitance (PF) C2	30

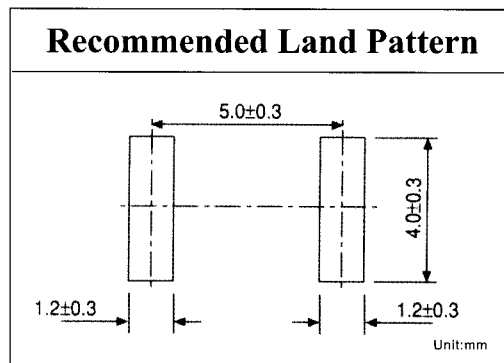

ORDERING INFORMATION

CR ■■■■■■ — ■■ — ■ ■■

Type	Frequency (MHz)	Series	Packing	Serial No.
e.g. 6.00MHz = 06000		Option (Reserve) " — " = Standard		For Special Requirement/ Specification.
Lead Type: " — " Standard		Packing: B = Bulk Pack A = Ammo Pack (Standard 2K/pack) K = 16mm Blister Tape (Standard 4K/pack) S = Special Packing Requirement L = 12mm Blister Tape (Standard 1K/Reel)		
CR=Ceramic Resonator		Series ZTACC = AC		
Part Number Example: e.g. ZTACC-MG Ceramic Resonator 2.00MHz, Bulk Pack = CR02000-AC-B00				


Vertrieb in Österreich:



Wolfgang Knap
Gesellschaft m.b.H. & Co.KG

A-1130 Wien
Lilienberggasse 13
Tel.: +43-1-403 08 12
Fax: +43-1-408 72 13
e-mail: info@knap.at
http://www.knap.at

ZTACC-MG DIMENSIONS

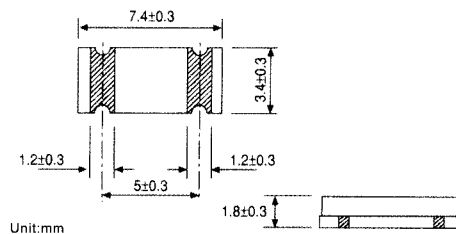

ZTACC-MG TEST CIRCUIT

