



CERAMIC RESONATORS (LOW FREQUENCY)

Type: ZTB-Y, KHz Band, fo: 375~1250 KHz

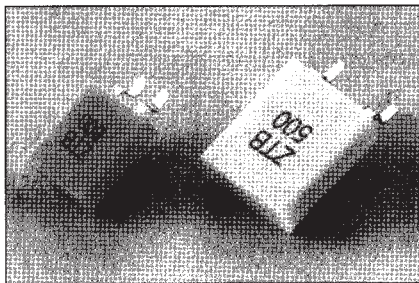

FEATURES:

- Formed Lead To SMD Type
- Frequency Range From 375KHz to 1250 KHz is Available

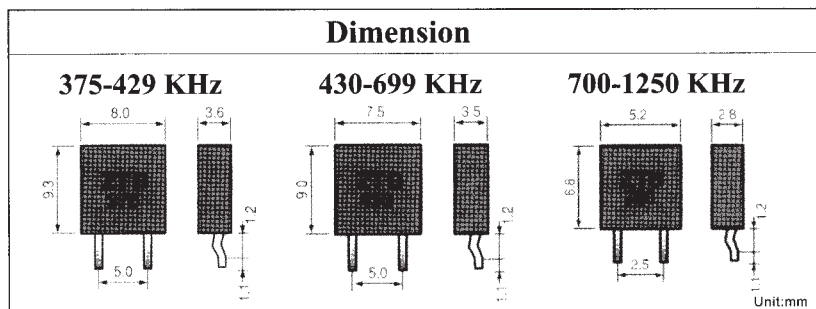

STANDARD SPECIFICATION	Frequency Range				
	375~400 KHz	401~509 KHz	510~699 KHz	700~999 KHz	1000~1250 KHz
Frequency Accuracy	± 2 KHz	± 2 KHz	± 2 KHz	± 0.5%	± 0.5%
Resonant Impedance (Ohm) MAX	20	20	30	70	100
Stability in Temperature (-20~+80°C)	± 0.3%	± 0.3%	± 0.3%	± 0.3%	± 0.3%
Aging For Ten Years	± 0.3%	± 0.3%	± 0.3%	± 0.3%	± 0.3%
Load Capacitance (PF) C1	120	100	100	100	100
Load Capacitance (PF) C2	470	100	100	100	100

ORDERING INFORMATION

CR ■■■■■ — ■■ — ■ ■■

Type	Frequency (KHz)	Series	Packing	Serial No.
e.g. 455KHz = 00455				
Lead Type: "B" Formed Lead		Option (Reserve) "n" = Standard		
CR=Ceramic Resonator		For Special Requirement/ Specification.		
Series ZTB-Y = BY		Packing: B = Bulk Pack A = Ammo Pack (Standard 2K/pack) K = 16mm Blister Tape (Standard 4K/pack) S = Special Packing Requirement L = 12mm Blister Tape (Standard 1K/Reel)		
*****Part Number Example:***** e.g. ZTB-Y Ceramic Resonator 455KHz, Bulk Pack = CR00455-BY-B00				

Vertrieb in Österreich:



Wolfgang Knap
Gesellschaft m.b.H. & Co.KG

A-1130 Wien
Lilienberggasse 13
Tel.: +43-1-403 08 12
Fax: +43-1-408 72 13
e-mail: info@knap.at
http://www.knap.at

TEST CIRCUIT

