


SURFACE MOUNT CERAMIC RESONATORS

Type: ZTTCC-MG MHz Band, fo: 2.00~8.00 MHz

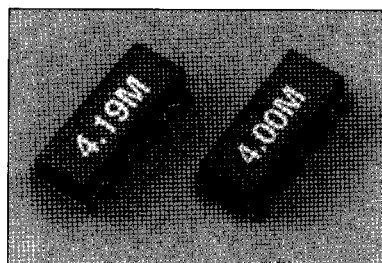


ZTTCC-MG, FEATURES

- Ultra-Small True Surface Mountable.
- Can Be Re-Flow Soldered
- Available In Tape And Reel Packaging
- Built In Load Capacitance

STANDARD SPECIFICATION	Frequency Range
	2.00~8.00MHz
Frequency Accuracy	$\pm 0.5\%$
Stability in Temperature (-20~+80°C)	$\pm 0.3\%$
Aging For Ten Years	$\pm 0.3\%$
Load Capacitance (PF) C1	24
Load Capacitance (PF) C2	24

Recommended Land Pattern

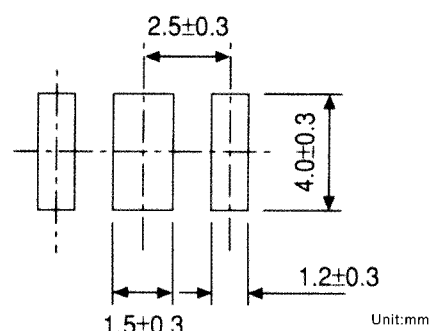

ORDERING INFORMATION

CR ■ ■ ■ ■ ■ — ■ ■ — ■ ■ ■


Type	Frequency (MHz)	Series	Packing	Serial No.
e.g. 6.00MHz = 06000		Option (Reserve) " — " = Standard		For Special Requirement/ Specification.
Lead Type: " — " Standard		Packing: B = Bulk Pack A = Ammo Pack (Standard 2K/pack) K = 16mm Blister Tape (Standard 4K/pack) S = Special Packing Requirement L = 12mm Blister Tape (Standard 1K/Reel)		
CR=Ceramic Resonator		Series ZTTCC-MG = CG		
Part Number Example: e.g. ZTTCC-MG Ceramic Resonator 2.00MHz, Bulk Pack = CR02000-CG-B00				

Vertrieb in Österreich:

WK A-1130 Wien
Lilienberggasse 13
Tel.: +43-1-403 08 12
Fax: +43-1-408 72 13
e-mail: info@knap.at
http://www.knap.at

Wolfgang Knap
Gesellschaft m.b.H. & Co.KG

ZTTCC-MG DIMENSIONS

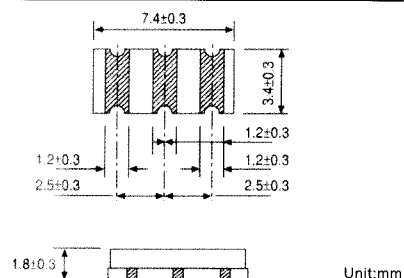

ZTTCC-MG TEST CIRCUIT

