

# WPM-2P PUSH SWITCHES SERIES




® Dailywell Electronics Co.,Ltd.  
Taiwan,R.O.C  
4F,NO.88,Chiao Ho Road ,Chung  
Ho City ,Taipei Hsien ,Taiwan.  
Tel :+886-2-22409060

## SPECIFICATIONS

- Rating :DC 30 V ,0.3 A
- Function :Lock/NON Lock
- Timing :NON-SHORTING
- Contact Resistance :30mΩMax
- Insulation Resistance :100MΩ Min
- Withstand Voltage :Withstand AC 500V(50-60Hz) for 1 minute.
- Operation Force :300gf ± 50gf
- Life Test :100,000 cycles operating at a rate of 15-18 cycles per minute.
- Resistance To Soldering Heat Test:260°C ± 5°C for 5 seconds.
- Practical Temperature Rang :-5°C to +60°C

## MATERIALS

- Frame:SPCC
- Spring Wire:SUS
- Spring:STAINLESS
- Base:Phenolic Resin
- Contact Clip:PBB
- Spring Plate:PBS
- Slider:POM
- Ering:SPCC
- Terminal:BRASS STRIP
- Cap:ABS

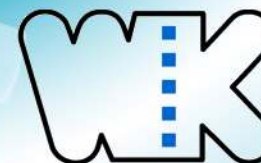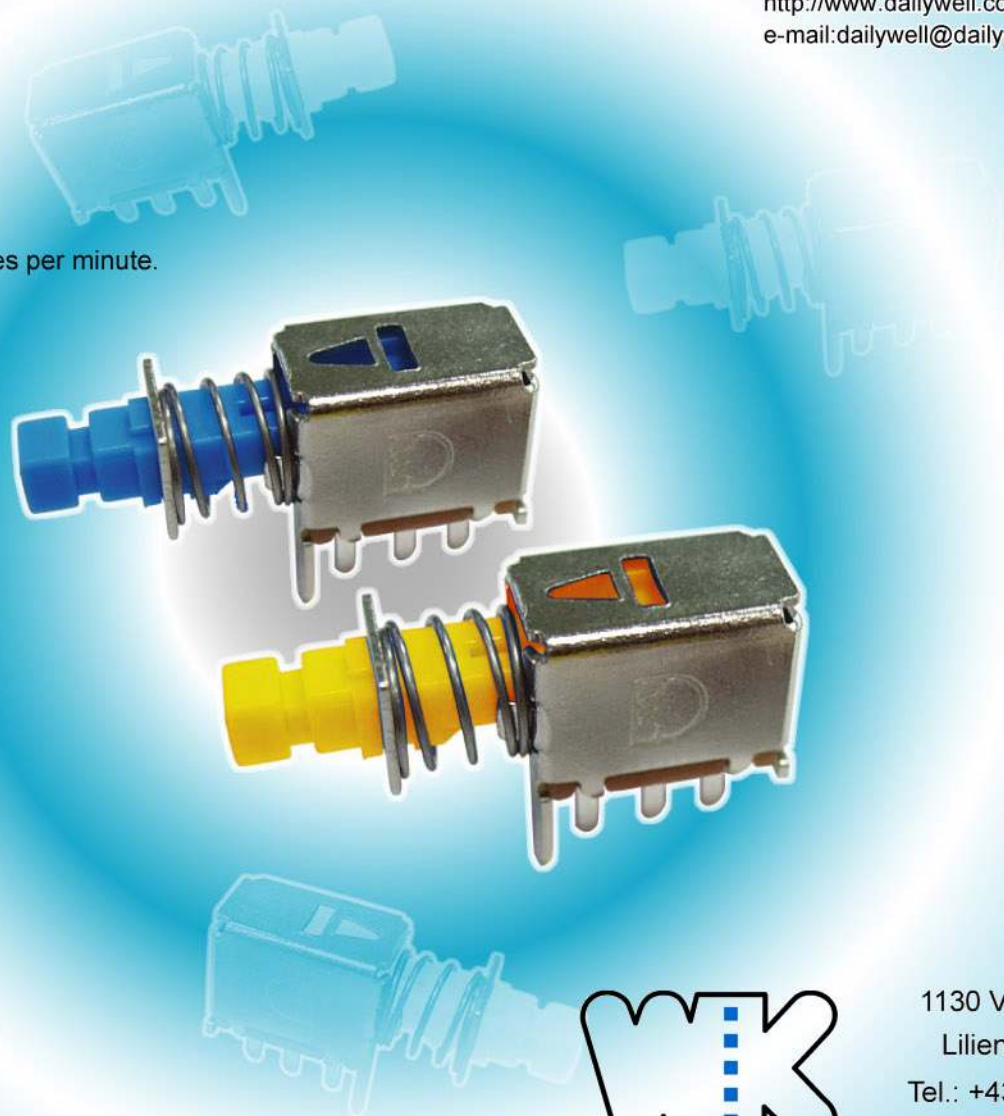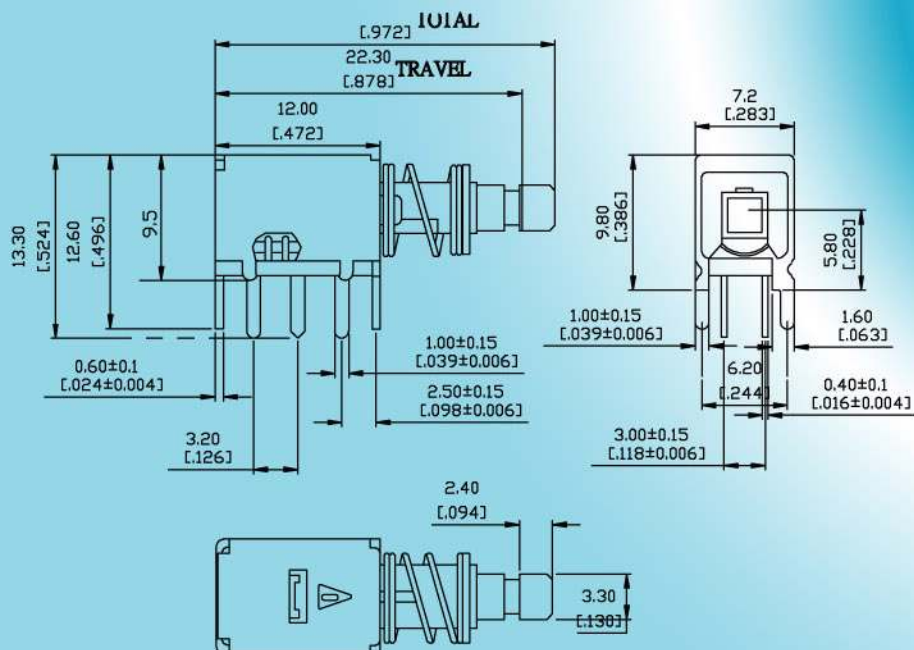

**Wolfgang Knap**  
Gesellschaft m.b.H. & Co.KG  
INDUSTRIELEKTRONIK

1130 Vienna, Austria  
Lilienberggasse 13  
Tel.: +43-1-403 08 12  
Fax: +43-1-408 72 13  
e-mail: info@knap.at  
<http://www.knap.at>

<http://www.dailywell.com.tw>  
e-mail:dailywell@dailywell.com.tw