
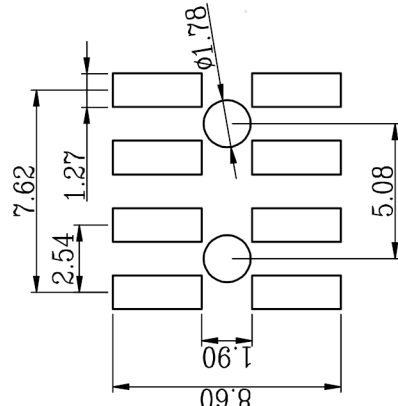
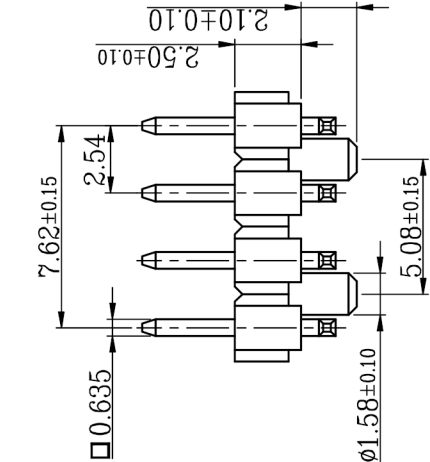
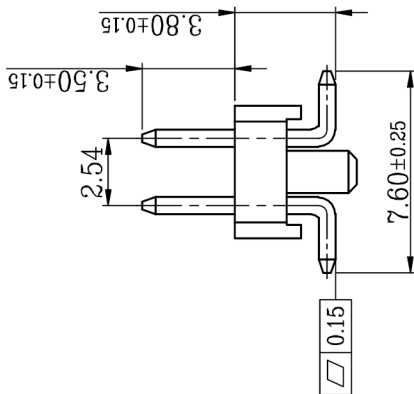


Technical Information:


Insulator Material	Hi-Temp Thermoplastic, UL94 V-0
Contact Material	Copper alloy
Contact Surface	Full Au flash 0.025µm min. over Ni
Contact Resistance	< 20 mΩ
Insulation Resistance	> 1000 MΩ
Test Voltage	500 V AC
Current Rating	3.0 A
Temperature Range	-40 °C ... +125 °C
Processing	230 °C for 30 ~ 60 sec. 260 °C for 10 sec.



P.C.B. LAYOUT

Tolerances if not noted otherwise: xx ±0.3 x.xx ±0.2 x.xxx ±0.1		Part Name SMT Pin Header, 2.54mm Pitch, vertical 2x04, Au, Loc. Pegs, B=3.5mm										
Index	Name	Date	Part Number 9132-12-008-00-0-10-TR									
REACH (EG) Nr: 1907/2006 RoHS 2011/65/EU compliant			Creation date 2019-05-22	Drawn uk	Checked ql	Approved ps	Approval date 2019-05-22					
									Sheet			
									File Name 81812-70054-20190522			



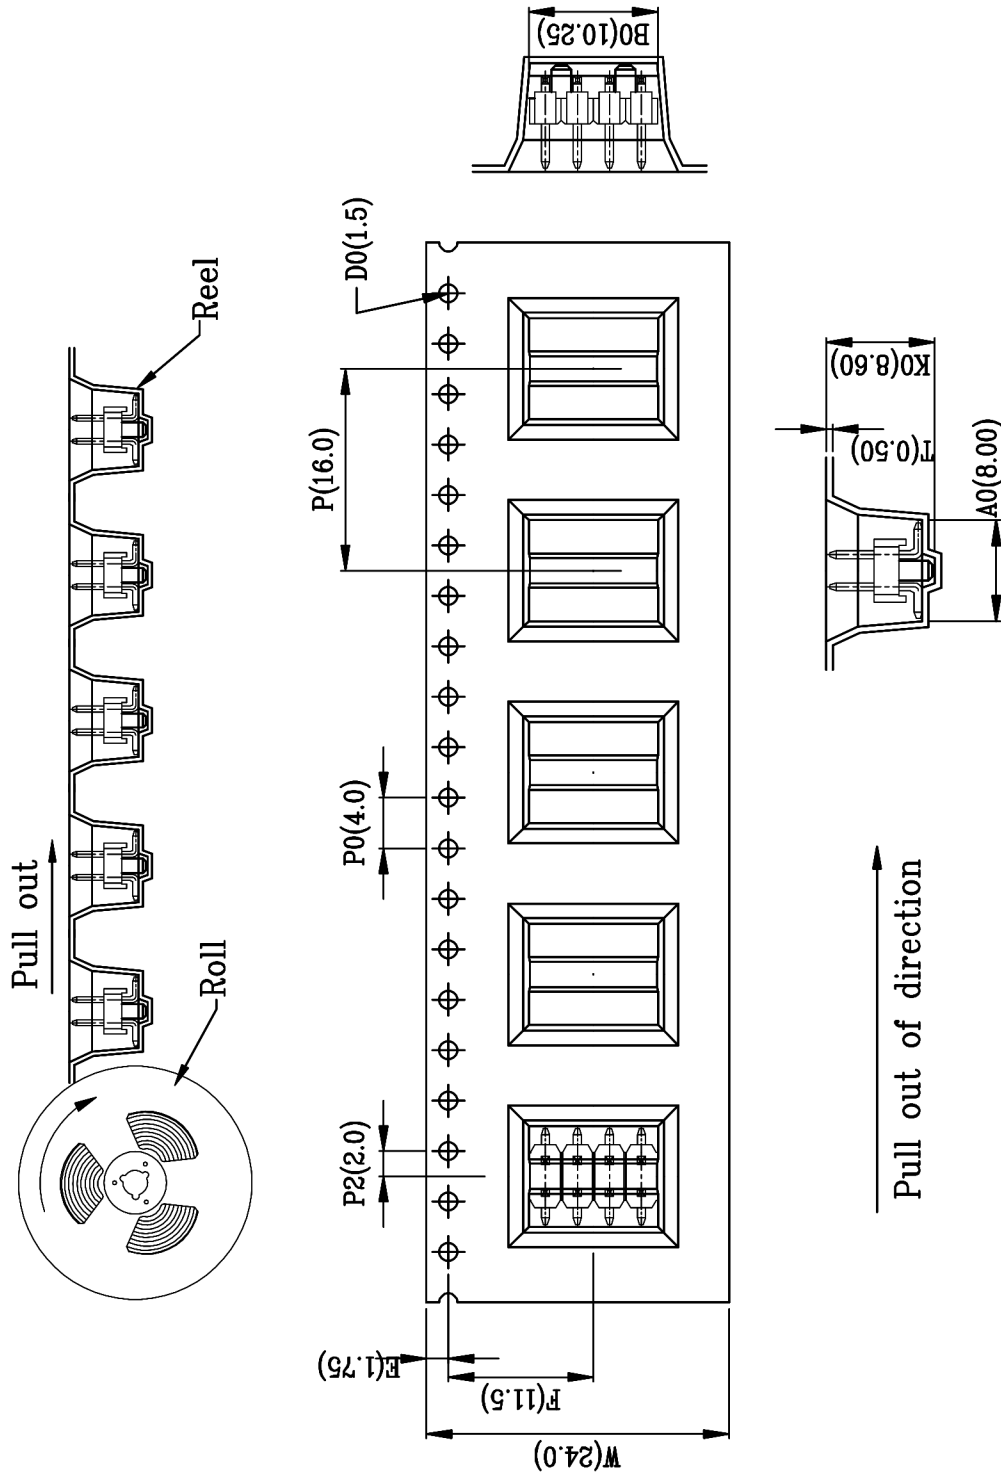

W	24.00±0.30
S	0.00±0.10
E	1.75±0.10
F	11.50±0.10
T	0.50±0.05
P	16.00±0.10
P0	4.00±0.10
P2	2.00±0.10
D0	ø1.50 ^{+0.10} _{-0.00}
A0	8.00±0.10
K0	8.60±0.10
B0	10.25±0.10

10 sprocket hole pitch cumulative tolerance ±0.20mm
Carrier camber is within 1 mm in 250 mm
Material : Black Conductive Polystyrene Alloy
All dimensions meet <<EIA-481-D>> requirements
Packing length per 13" reel : 8.6 Meters
Component load per 13" reel : 500 pcs.

Tolerances if not noted otherwise:
xx ±0.3 xx ±0.2 xxx ±0.1

W+P[®]

WE CONNECT IT

Part Name
Tape & Reel Packaging for
SMT Pin Header, 2.54mm Pitch, vertical

Part Number
9132-12-008-00-0-10-TR

Index

Name

Date

Creation date
2019-05-22

Drawn
uk

Checked
ql

Approved
ps

Approval date
2019-05-22

REACH (EG) Nr. 1907/2006
RoHS 2011/65/EU compliant

File Name
81812-70054--20190522

Sheet