


DIN 41612 Short Body R Type Male

Specifications


Current Rate: 2 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 30mΩ Max.
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -55°C to +105°C

Material

Insulator: Polyester, UL 94V-0
Standard: PBT
Terminal: Copper Alloy
Plating: Selective Gold Plating

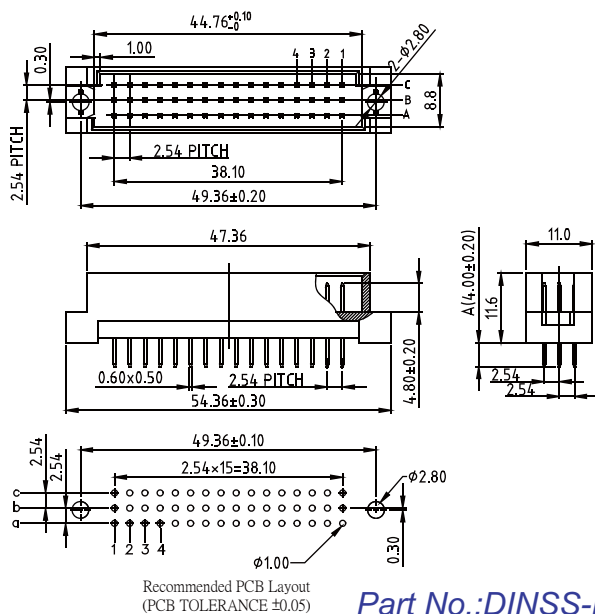

Part No.: DINSS-M3XX-L

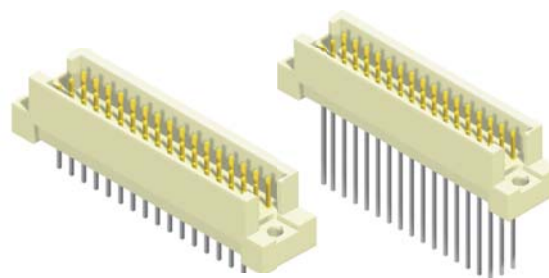

Pitch	No. of Contacts	Rows with Contacts	Contact Arrange
2.54mm	48	A B C	
	32A	A - C	
	32B	A B -	
	16	A - -	
5.08mm	24	A B C	
	16A	A - C	
	16B	A B -	
	8	A - -	


DIN 41612 Short Body R Type Female

Specifications


Current Rate: 2 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 30mΩ Max.
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -55°C to +105°C

Material

Insulator: Polyester, UL 94V-0
Standard: PBT
Terminal: Copper Alloy
Plating: Selective Gold Plating

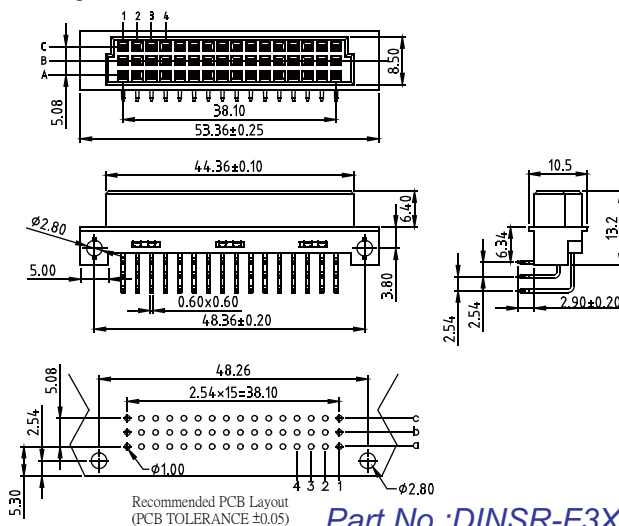

Part No.: DINSR-F3XX-L



Pitch	No. of Contacts	Rows with Contacts	Contact Arrange
2.54	48	A B C	
	32A	A - C	
	32B	A B -	
	16	A - -	
5.08	24	A B C	
	16A	A - C	
	16B	A B -	
	8	A - -	

ORDER INFORMATION

