



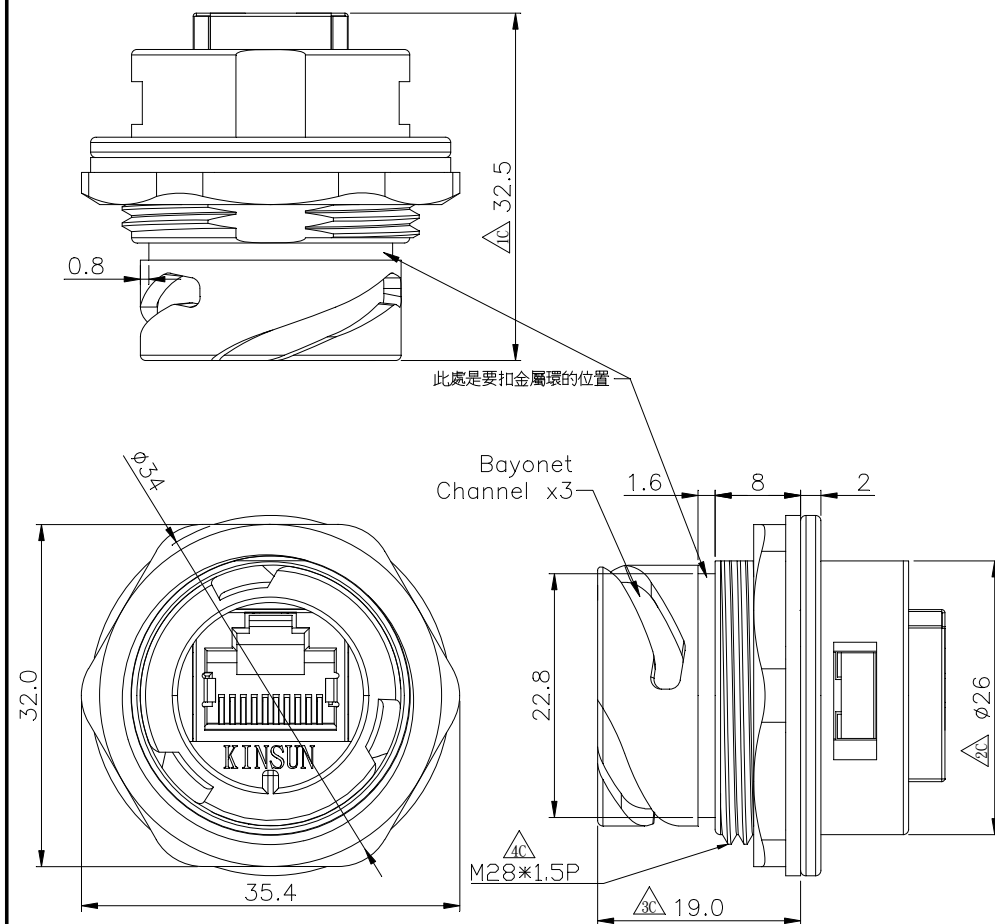

BOM:
50u" 3353D00040

Panel Cut-Out

RoHS COMPLIANT

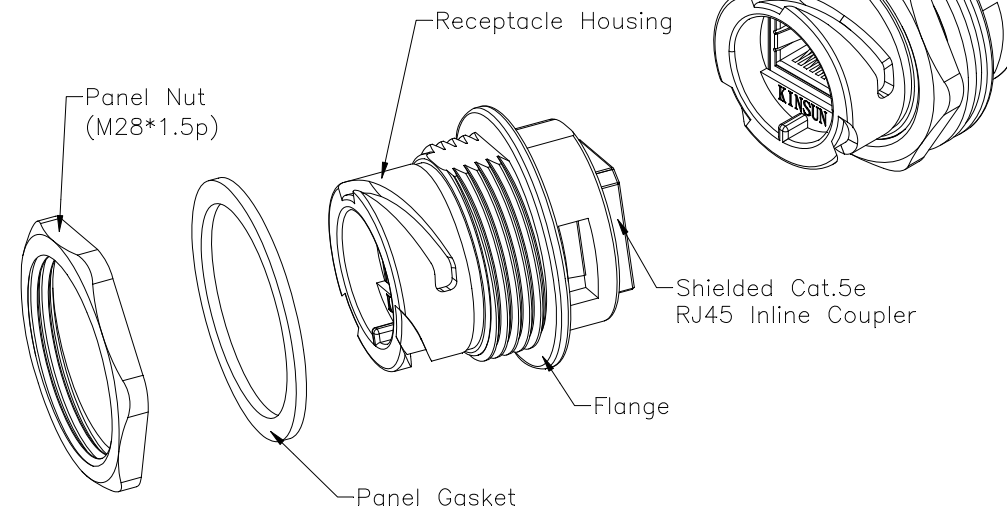

Electrical Specifications:

Meets EIA/TIA-568-B.2 Cat.5e Specification

Contact Resistance: 20 mOhm max

Insulation Resistance: 500 MOhm min @100V DC

Current Rating: 1.5A max

Voltage Rating: 100VDC

DWV: 1000V DC/60s min Contact to Contact, 1500V DC/60s Contact to Metal Shell

Operating Temperature: -40°C TO +85°C

Material and Finish

Receptacle Housing: Zn Alloy 3, Nickel Plated

Panel Nut: Copper Alloy, Nickel Plated

Panel Gasket: Silicone

RJ45 Jack Metal Shell: Copper Alloy, Nickel Plated

RJ45 Jack Plastic Housing: Engineering Thermoplastic Flammability Rating UL94 V-0

RJ45 Jack Contact: Phosphor Bronze, finish: Gold over Nickel

Color: Black

Connector can be front mounted to a maximum panel thickness of 3.2mm.

設計 DR. Leon 2015/01/05	核准 APPD. Marco 2015/01/05	容許公差 .XXX .XX .X X ANG	TOLERANCE ±0.10 ±0.25 ±0.38 ±0.50 ±3°	品名 ARTICLE 3353防水接頭(盒端)
版本說明 — — — 修正 4 C 尺寸 — — —		REVISION NOTE		圖號 DWG NO. 3353D00040
KINSUN		單位 UNIT mm		比例 SCALE 2/1
				張數 SHEET 1/1
				版本 REV. D