





Panel Cut-out

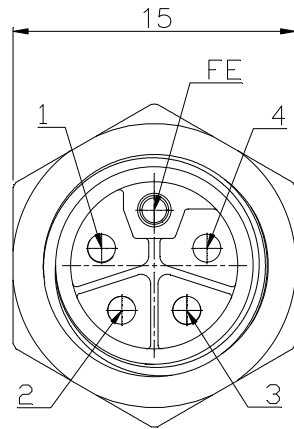


## NOTES:


1. Waterproof Rate: IP68
2. Current Rating: 16A
3. Rated voltage: 63V AC/63V DC
4. Insulation Resistance: 100 Megaohm min.

## Material:


1. Plastic Housing : Engineering Plastic  
Flammability Rating UL 94V-0. Color :GREEN
2. Coupling Nut : M12\*P1.0 Brass With Nickel Plated
3. Screw Nut: Brass With Nickel Plated
4. Contacts : Copper Alloy With Gold Plating Over Nickel In Contact
5. O-RING : NBR Rubber Black Color
6. Glue

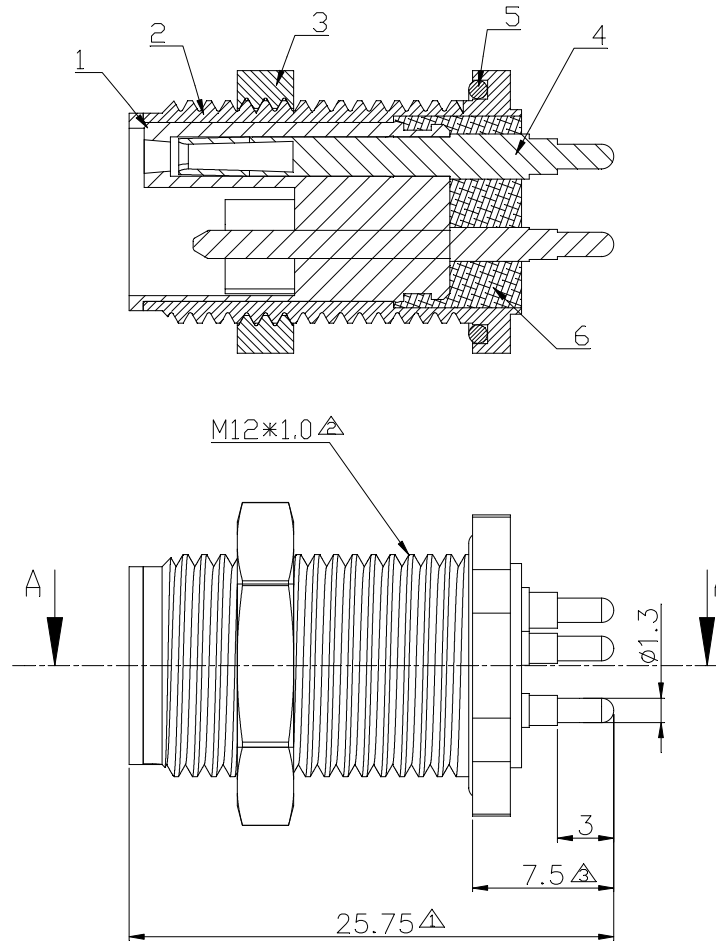

RoHS COMPLIANT

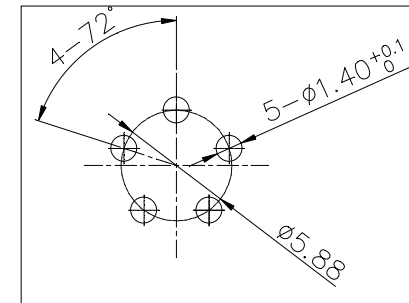

Pin Layout PCB

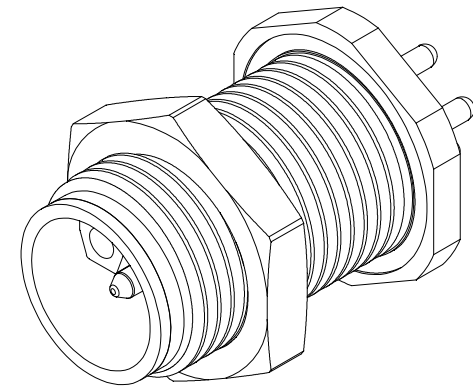

|                              |                                |                                                                   |           |                                  |
|------------------------------|--------------------------------|-------------------------------------------------------------------|-----------|----------------------------------|
| 設計 DR.<br>WENDY<br>2021/7/16 | 核准 APPD.<br>Marco<br>2021/7/16 | 容許公差<br>.XXX ±0.10<br>.XX ±0.25<br>.X ±0.38<br>X ±0.50<br>ANG ±3° | TOLERANCE | 品名<br>M12 L Code 板端公頭 (4+FE) DIP |
| 版本說明<br>E302-1808037         | REVISION NOTE                  |                                                                   |           | 圖號<br>4005ACL000                 |
| KINSUN                       |                                | 單位 UNIT 比例 SCALE 張數 SHEET 版本 REV.                                 |           |                                  |
|                              |                                | mm 1.5/1 1/1 A                                                    |           |                                  |

