




## Waterproof Connectors (M8 Male) (IP68)

**KINSUN**

|                                      |                                                                                   |                                                                                   |
|--------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| CONTACT<br>ARRANGEMENT<br>FRONT VIEW |  |  |
|                                      | 4P                                                                                | 3P                                                                                |

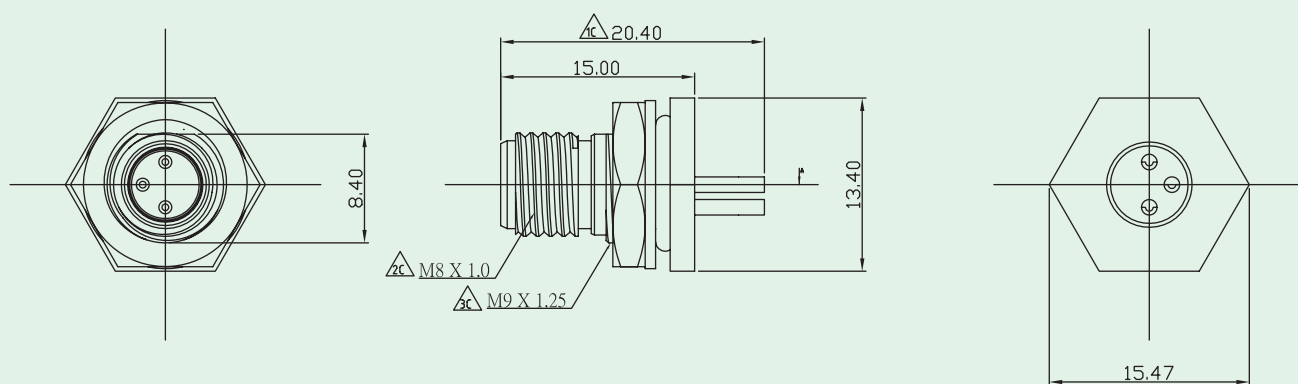

### Materials

- **Plastic Housing** : Engineering Thermoplastic  
Flammability Rating UL 94V-0.
- **Contacts** : Copper Alloy.
- **Plating** : Gold Plating Over Nickel In Contact.
- **O-Ring** : Silicone Rubber Black Color.
- **Shield** : Brass With Nickel Plated.



### Ratings and Characteristics

- **Current Rating** : 3A(3Pin)  
3A(4Pin)
- **Rated Voltage** : 60V AC/DC(3Pin)  
30V AC/DC(4Pin)
- **Insulation Resistance** :  $10^8 \Omega$  Min

### Ordering Information

**4012A** ☐

Series No.

3=3Pins  
4=4Pins