




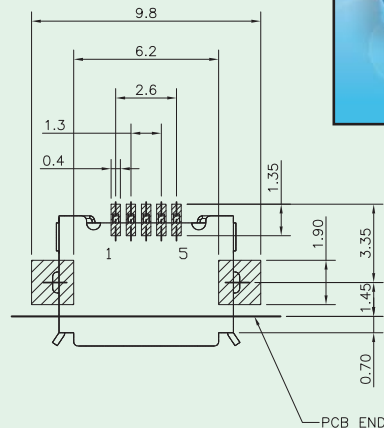


USB 2.0 Micro-B Receptacle

KINSUN



PCB LAYOUT/TOP VIEW

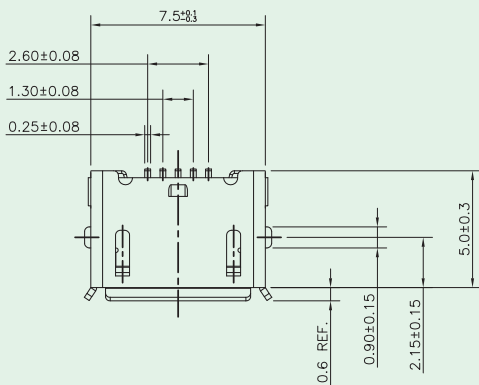

Voltage Rating : 5V AC
Current Rating : 1.5AMP
Insulation Resistance : 100 MΩ Min
Contact Resistance : 30 mΩ Max.
Dielectric Withstanding : 100V AC
Temperature Range : -30°C to +85°C

Materials

- **Plastic Housing** : Engineering Thermoplastic.
Flammability Rating UL 94V-0.
- **Contacts** : Phosphor Bronze.
- **Plating** : Gold Plating Over Nickel In Contact Area.
Tin Plating Over Nickel In Solder Area.
- **Shield** : Brass Plating Tin. (Matte Sn)



Ordering Information

6135 - H Series

Series No.

H : Side Entry, SMT