




USB Standard-A Plug (TH TYPE)

KINSUN

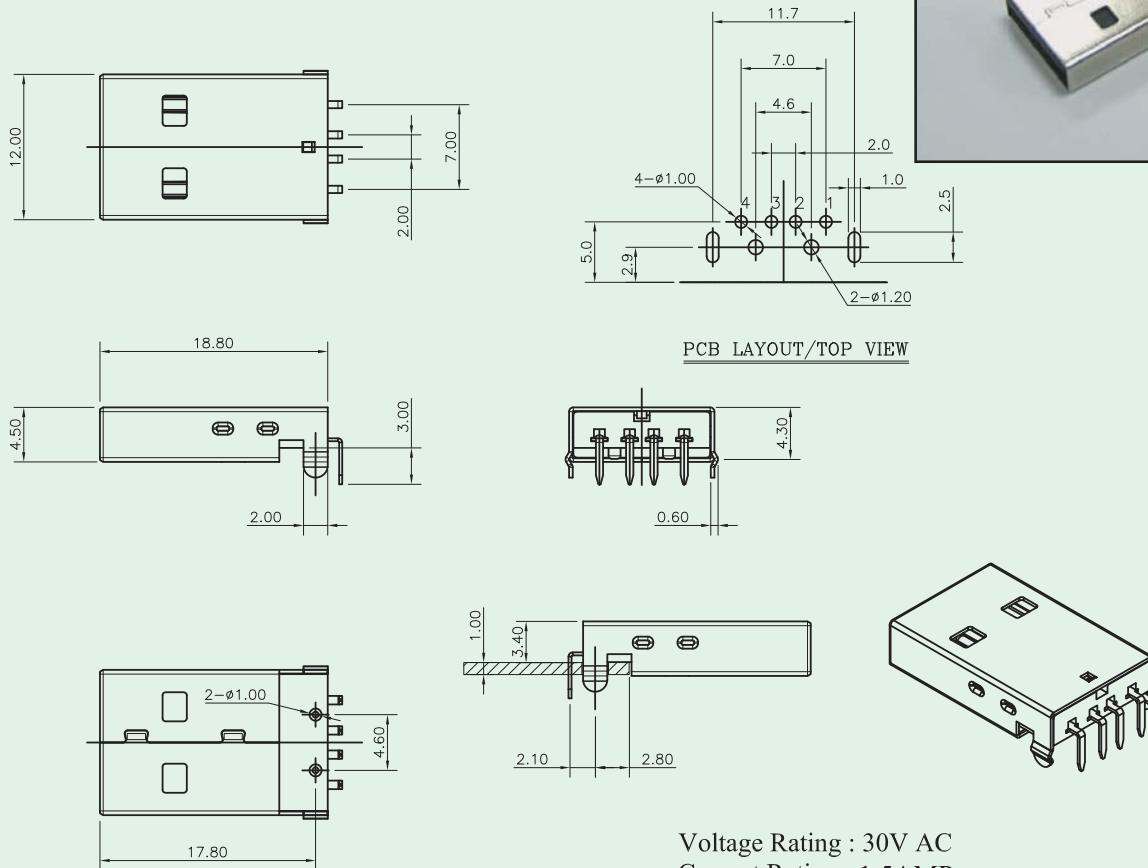

Voltage Rating : 30V AC
Current Rating : 1.5AMP
Insulation Resistance : 1000 MΩ Min
Contact Resistance : 30 mΩ Max
Dielectric Withstanding Voltage : 500V AC
Temperature Range : -20°C to +85°C

Materials

- **Plastic Housing** : Engineering Thermoplastic.
Flammability Rating UL 94V-0.
- **Contacts** : Phosphor Bronze.
- **Plating** : Gold Plating Over Nickel In Contact Area.
Tin Plating Over Nickel In Solder Area.
- **Shield** : Steel Plating Nickel.



Ordering Information

6150 - P Series

Series No.

P : Side Entry, TH