

**Pushpull Waterproof Connector:**

RJ 45 Cat.5e Box Side (IP 68) 2

RJ Plug Cable Side (IP 68) 3

Fiber LC Adapter Box Side (IP 68) 4

Fiber Cable Side (IP 68) 5

Optic Extension Cord Adapter (IP 68) 6

USB Box Side (IP 68) 7

Dust Cap (IP 68) 8

Dust Cap With Chain (IP 68) 9

4 Pin Power Connector (IP68) 10

Cable Gland:



M20 Cable Gland (IP68) 11

Kinsun's Waterproof Series 12




Pushpull Cat.5e RJ45 Box Side (IP 68)

KINSUN

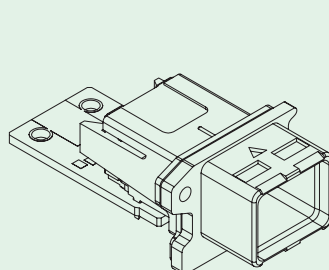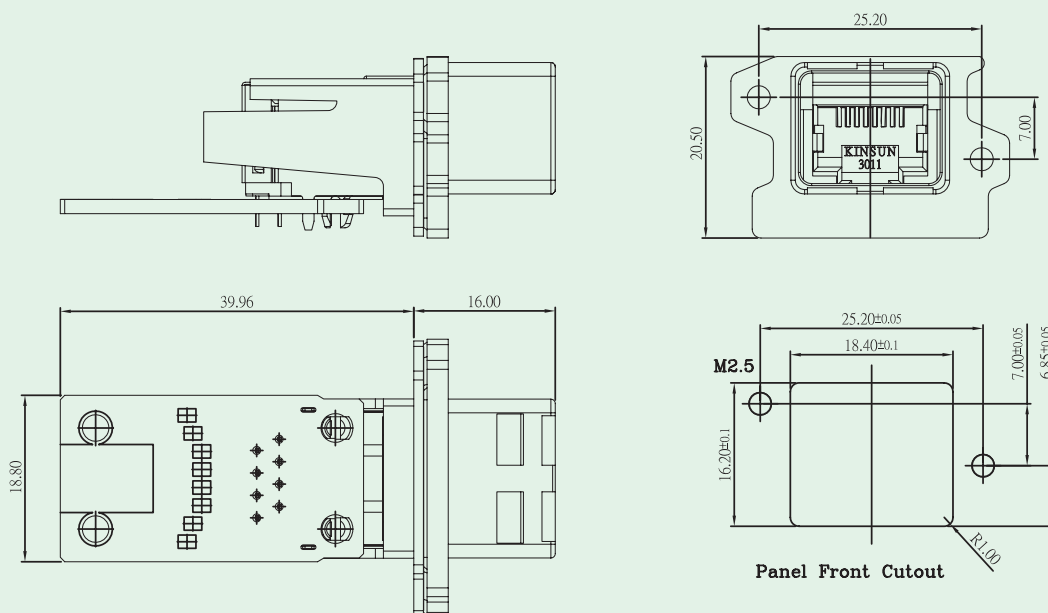

Single RJ45 Jack TYPE

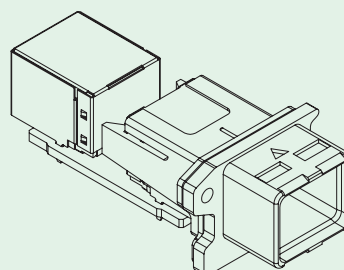

Coupler RJ45 Jack TYPE

Materials

RoHS-Compliant

- **Plastic Housing** : Engineering Thermoplastic.
Flammability Rating UL 94V-0.
- **Contacts** : Phosphor Bronze.
- **Plating** : Gold Plating Over Nickel In Contact.
Tin Plating Over Nickel In Solder Area.
- **Gasket** : Silicon

Ordering Information


3358 C ☐

1 = Single Type
2 = Dual Type



Pushpull RJ45 Cat.6 Cable Side (IP 68 / Without LAN Cable)

KINSUN

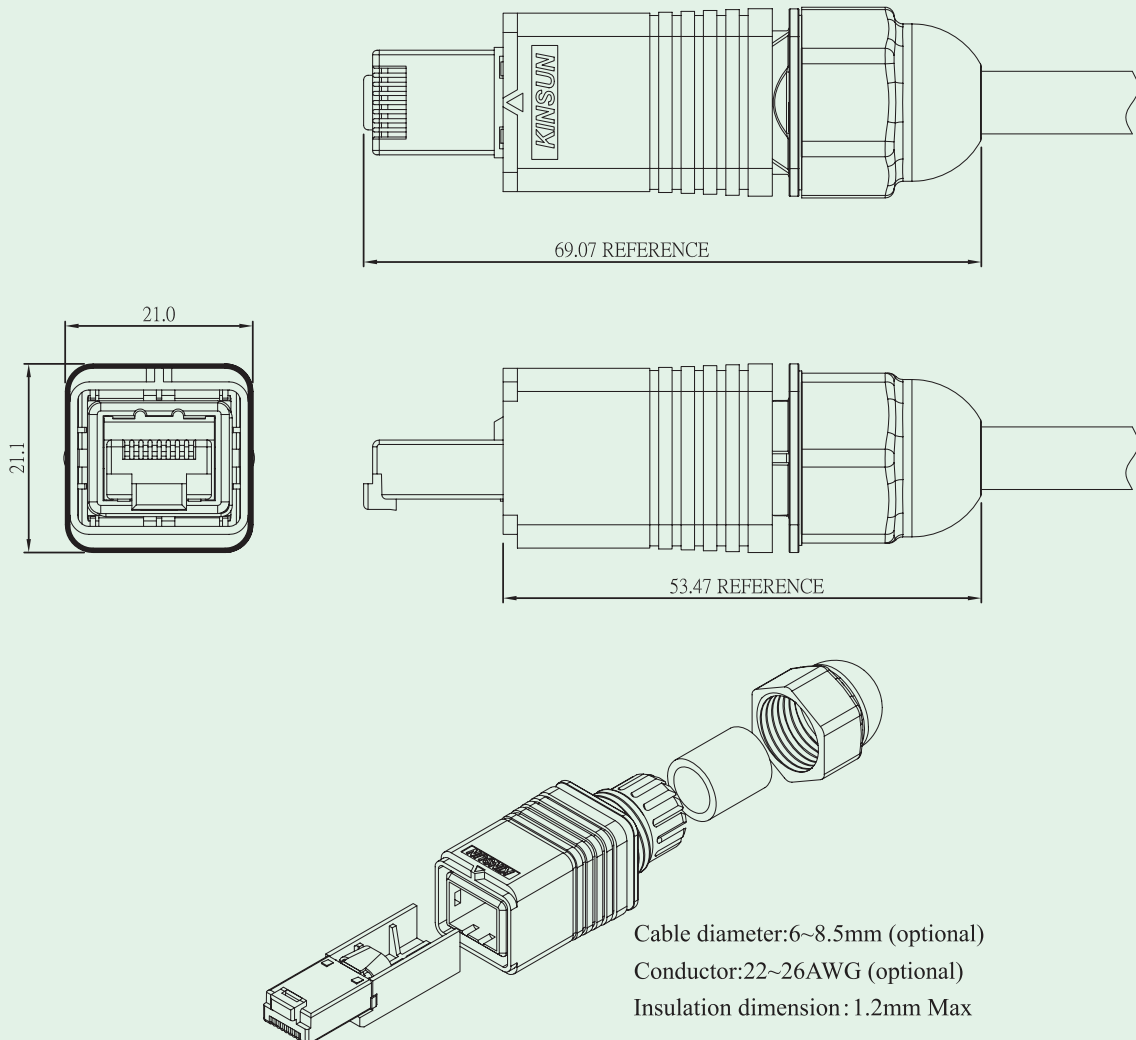

Materials

RoHS-Compliant

- **Plastic Housing** : Engineering Thermoplastic.
Flammability Rating UL 94V-0.
- **Contacts** : Phosphor Bronze.
- **Plating** : Gold Plating Over Nickel In Contact.
Tin Plating Over Nickel In Solder Area.
- **O-Ring** : NBR Rubber.


Ordering Information

3358 L



Pushpull Fiber Adapter Box Side (IP 68)

KINSUN

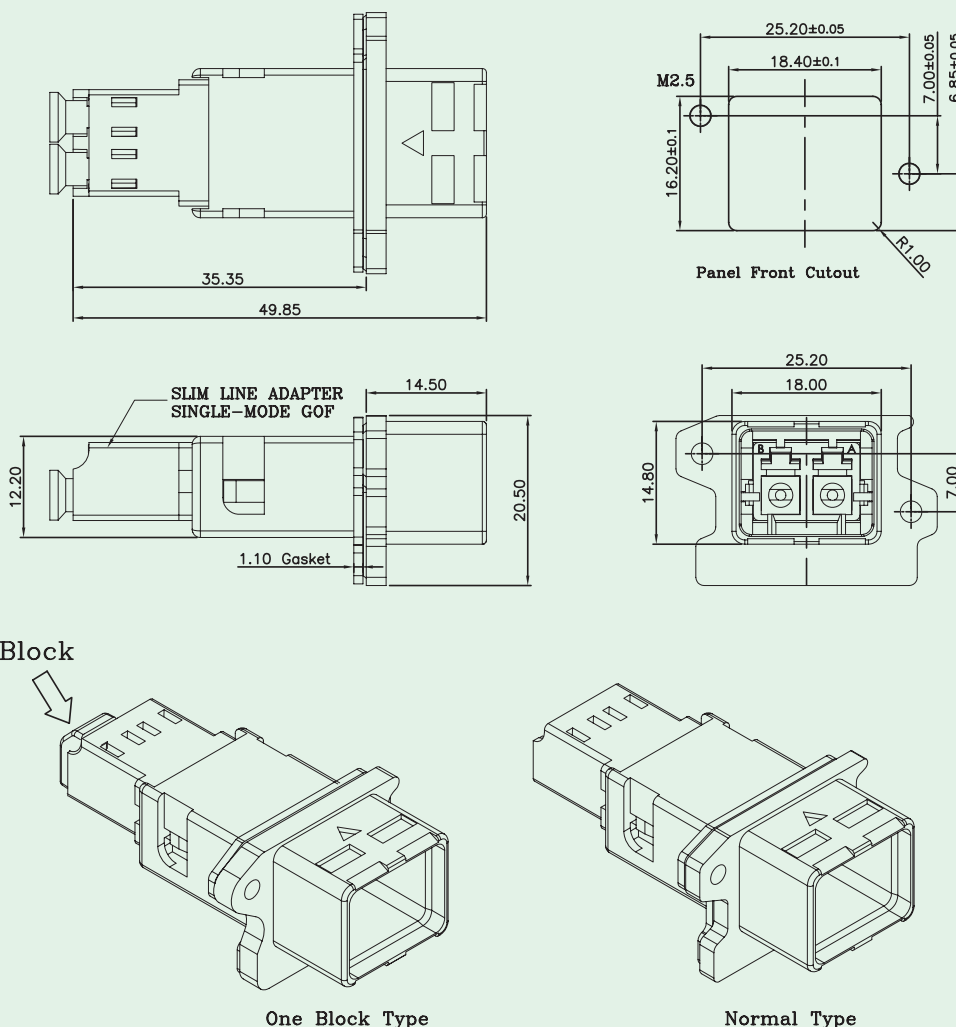

Materials

RoHS-Compliant

- **Plastic Housing** : Engineering Thermoplastic.
Flammability Rating UL 94V-0.
- **Gasket** : Silicon.
- **Connector** : LC Adapter Duplex.

Ordering Information

3358 D




0 : Normal Type
1 : Single Block Type



Pushpull Fiber Cable Side (For LC Patch Cabel / IP68)

KINSUN

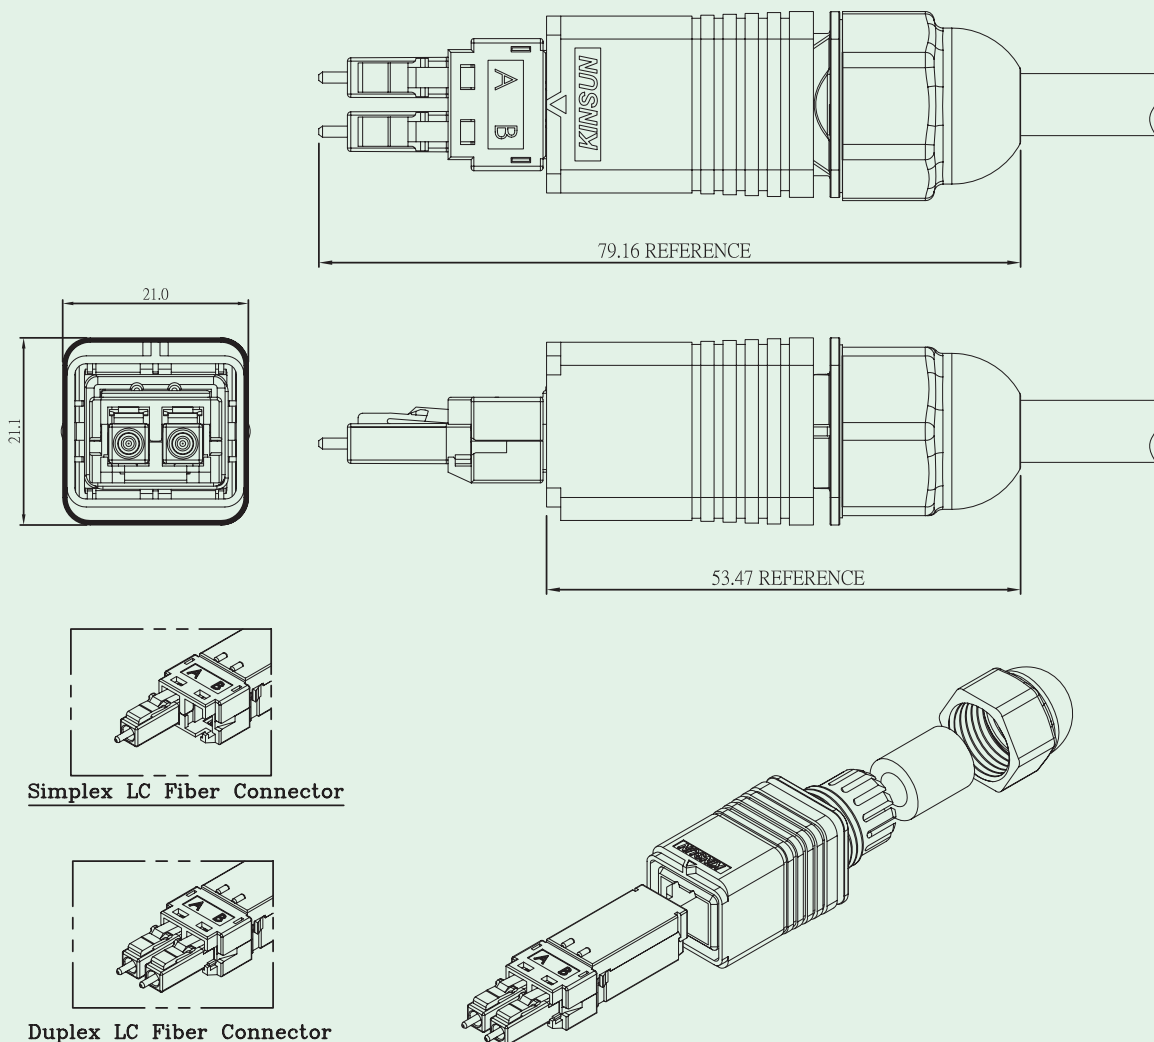

Materials

RoHS-Compliant

- **Plastic Housing** : Engineering Thermoplastic.
Flammability Rating UL 94V-0.
- **O-Ring** : NBR Rubber.
- **Connector** : LC Optic Connector
- **Cable diameter** : 5.5-6mm

Ordering Information


3358 LC ☐

1 = Single Type
2 = Dual Type



Optic Extension Cord Adapter (IP 68)

KINSUN

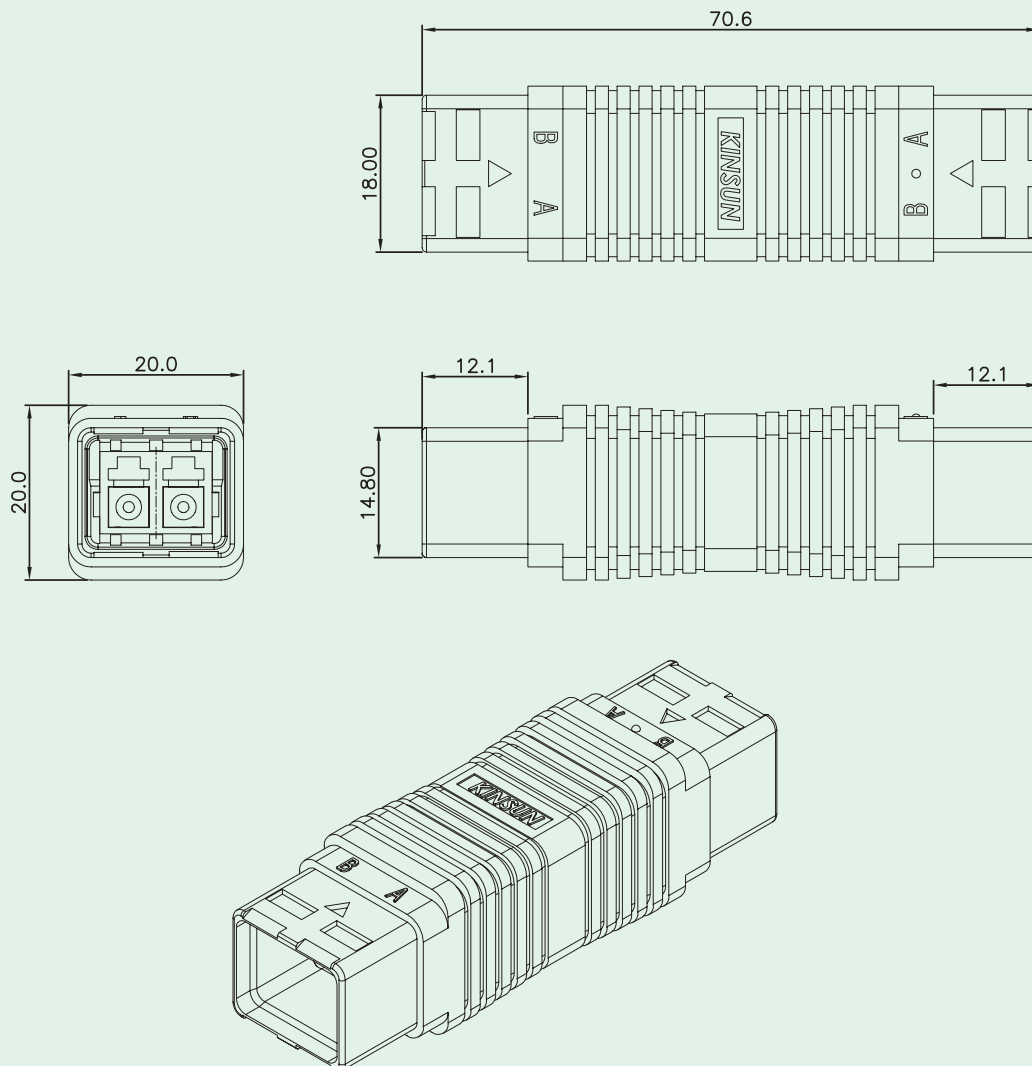

Materials

RoHS-Compliant

- **Plastic Housing** : Engineering Thermoplastic.
Flammability Rating UL 94V-0.
- **Connector** : LC Adapter Duplex.



Ordering Information

3358 M




Pushpull USB 2.0 Jack Box Side (IP 68)

KINSUN

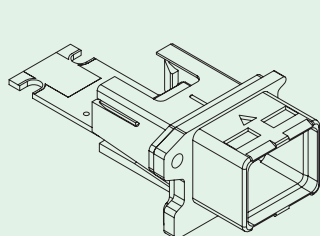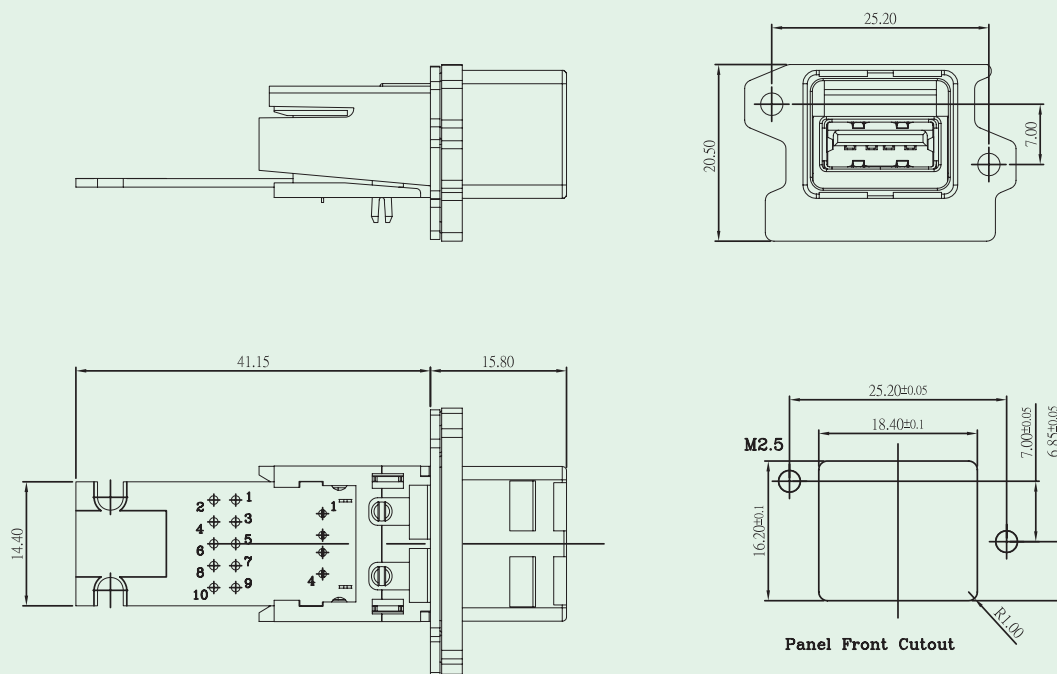

Single USB/A Type Jack

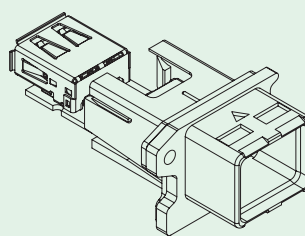

Coupler USB/A Type Jack

Materials

RoHS-Compliant

- **Plastic Housing** : Engineering Thermoplastic.
Flammability Rating UL 94V-0.
- **Contacts** : Phosphor Bronze.
- **Plating** : Gold Plating Over Nickel In Contact.
Tin Plating Over Nickel In Solder Area.
- **Gasket** : Silicon

Ordering Information

3358 E





1 = Single Type
2 = Dual Type



Pushpull Cap (IP 68)

KINSUN

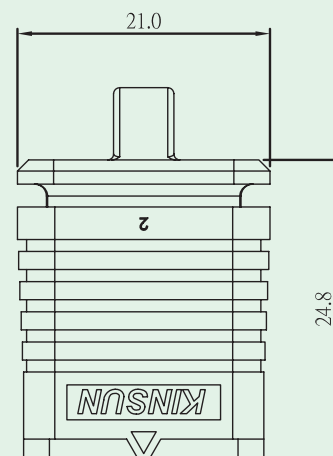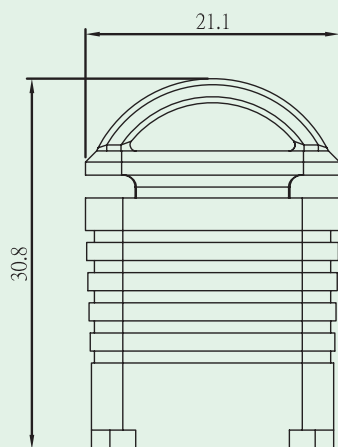

Materials

RoHS-Compliant

- **Plastic Housing** : Engineering Thermoplastic.
Flammability Rating UL 94V-0.
- **O-Ring** : NBR Rubber.


Ordering Information

3358 A-00



Pushpull Cap With Chain (IP 68)

KINSUN

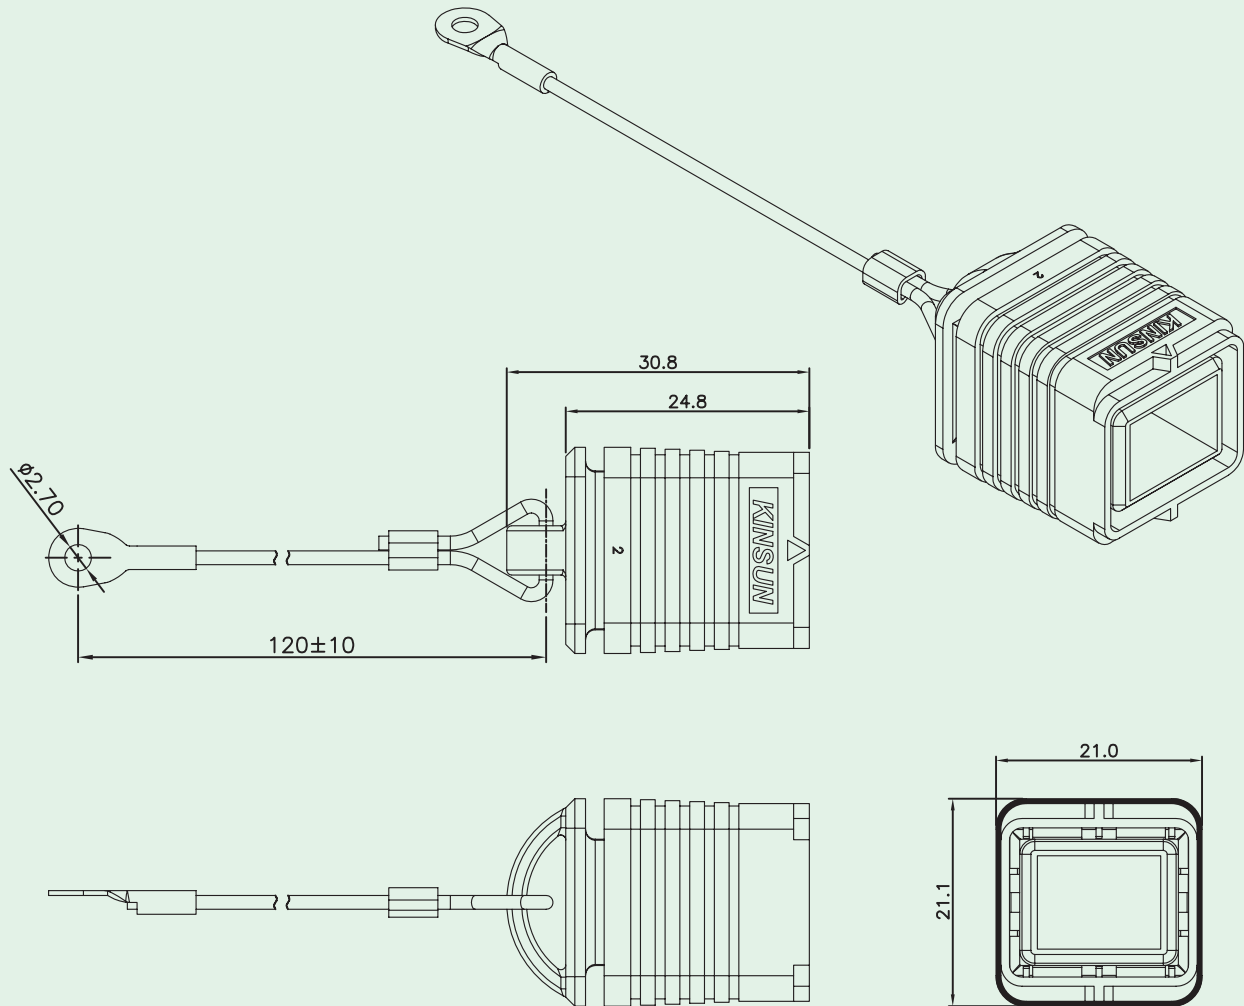

Materials

RoHS-Compliant

- **Plastic Housing** : Engineering Thermoplastic.
Flammability Rating UL 94V-0.
- **O-Ring** : NBR Rubber.
- **M2.5 Screw Crimping Ring**: Stainless Steel.
- **Cord** : Nylon.




Ordering Information

3358 A-01




Pushpull 4 Pin Power Connector (IP 68) OEM

KINSUN

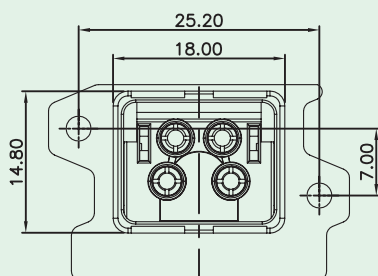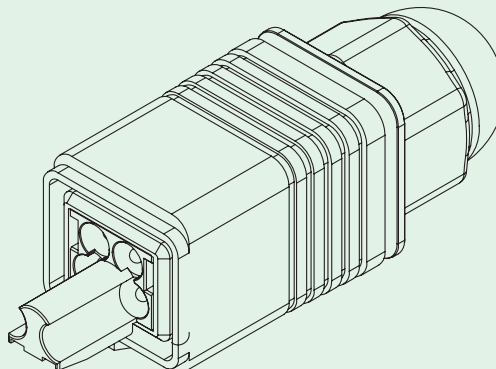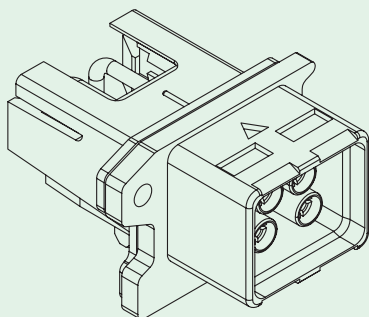

PANEL SIDE

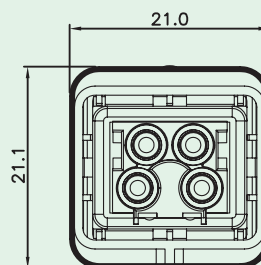

CABEL SIDE

Materials

RoHS-Compliant

- **Plastic Housing** : Engineering Thermoplastic.
Flammability Rating UL 94V-0.
- **O-Ring** : NBR Rubber.
- **Contacts** : 4pin Power Connector.



Ordering Information

3358 G



Cable Gland (IP68)

KINSUN

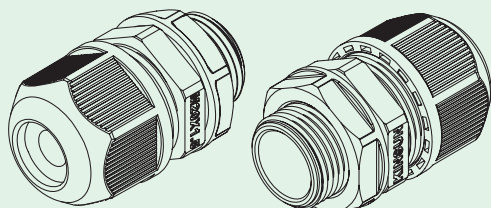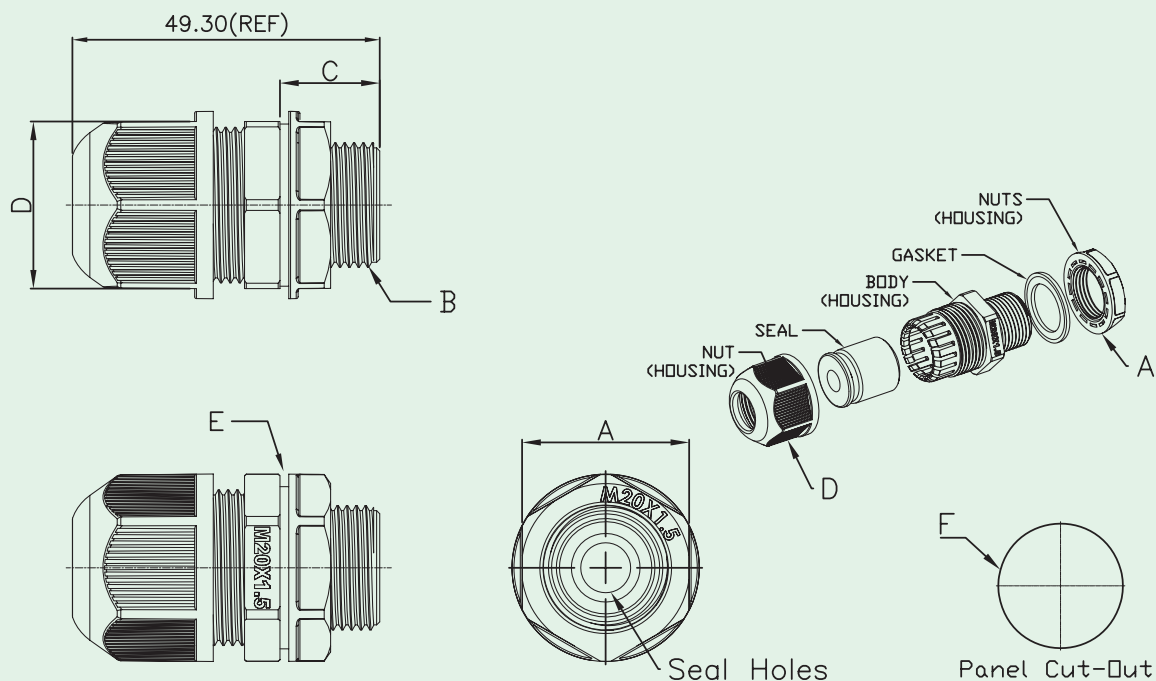

Seal Holes	Thread B	Thread Length C	Cable Range ϕ	Spanner Size A / D	Panel Thick (Max.) E	Panel Mounting Hole F
1	M20x1.5P	16	10.0~11.0	27 / 27	6.50	20~20.3
1	M20x1.5P	16	6.6~7.0	27 / 27	6.50	20~20.3
2	M20x1.5P	16	2.8~3.0	27 / 27	6.50	20~20.3
4	M20x1.5P	16	1.8~2.0	27 / 27	6.50	20~20.3

Materials

RoHS-Compliant

- **Housing** : Engineering Thermoplastic.
Flammability Rating UL 94V-0.
- **Seal & Gasket** : EPDM.
- **Operating Temperature** : 40° C - 105° C

Ordering Information

4301-Series

Series No.

- Other than Standard Series are available



**Kinsun's
Waterproof Series**

KINSUN

Kinsun Industries is a leading and experienced manufacturer of waterproof connectors.

Kinsun's waterproof connectors include screw types, quick-lock types, pushpull types, M8/M12 types. Our waterproof connectors have undergone a variety of reliable tests including: IP 68 test, air leak test, UV test, temperature cycling test...and so on.

The applications for our waterproof connectors are wide, for example: infrastructure, maritime industries, and other harsh outdoor environments.

As a well developed manufacturer in Taiwan, we seek further enhanced cooperation and cherish the Win-Win business in global market.

