

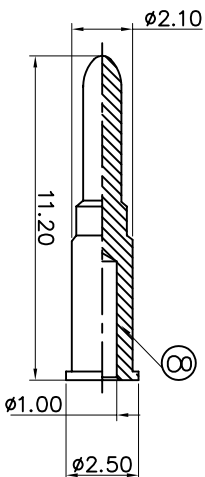


FE COMMENDED CABLE STRIPPING DIM'S  
(建議剖線尺寸)

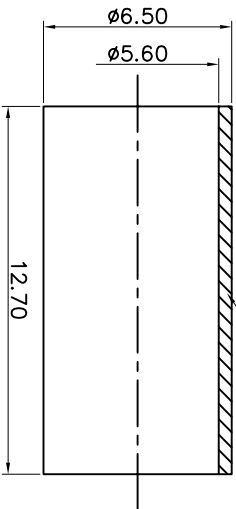

STAKE IN 3 PLACES EQUALLY  
SPACED 120° APART  
(打三點，間隔120°)

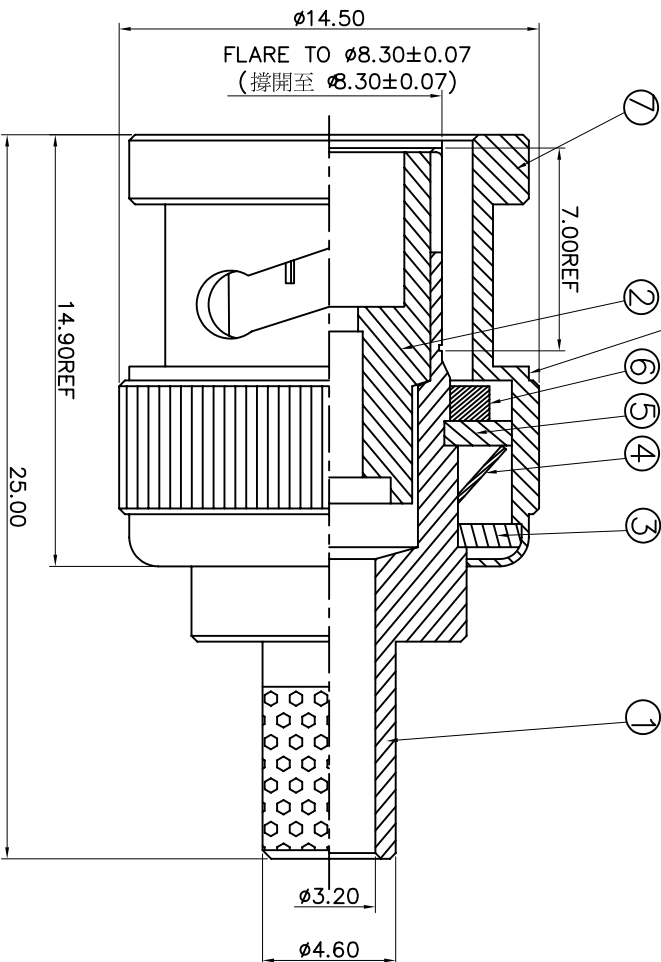

|     |             |          |      |            |               |
|-----|-------------|----------|------|------------|---------------|
| 9.  | Ferrule     | Note 4   | 1    | C0B-001N   | Nickel Plated |
| 8.  | Contact pin | Note 1   | 1    | C01-002C04 | Gold Plated   |
| 7.  | Shell       | Note1    |      |            | Nickel Plated |
| 6.  | Gasket      | Rubber   |      |            | Red Color     |
| 5.  | Washer      | SS41     |      |            | Nickel Plated |
| 4.  | C Ring      | SKS      |      |            | Nickel Plated |
| 3.  | Washer      | SS41     |      |            | Nickel Plated |
| 2.  | Insulator   | Delrin   |      |            | White Color   |
| 1.  | Booy        | Note 1   |      |            | Nickel Plated |
| NO. | Description | Material | Q'TY | Drawing No | Finish        |



S.C.PRECISION INDUSTRIAL CO., LTD.

PART NAME : BNC CRIMP PLUG  
LFOR RG-58/U

PART NUMBER:SCBN012NPG0A000G

VERSION:2.0

TOLERANCES: 0.5-6 =  $\pm 0.2$  6-30 =  $\pm 0.4$  30-120 =  $\pm 0.6$ UNIT:mm



SCALE: /

DATE

DWN

CHKD

APVD

MANAGER

NOTES:

FINISH/PLATING THICKNESS IN MICRO-INCHES)

1.BRASS PER QQ-B-626

2.NICKEL PL 70 MIN THICK OVER COPPER STRIKE

3.GOLD PL FLUSH OVER NICKEL PL 70 MIN THICK

OVER COPPER STRIKE

4.BRASS JIS H 3250 C 2700

Remark: ▲: The Most Important Dimension

RoHS  
Compliant

For Reference  
僅供參考