

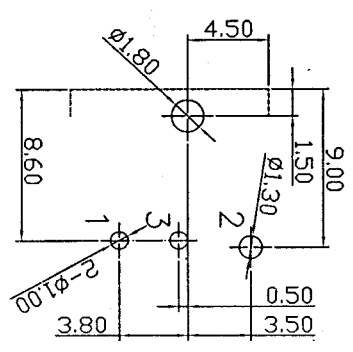
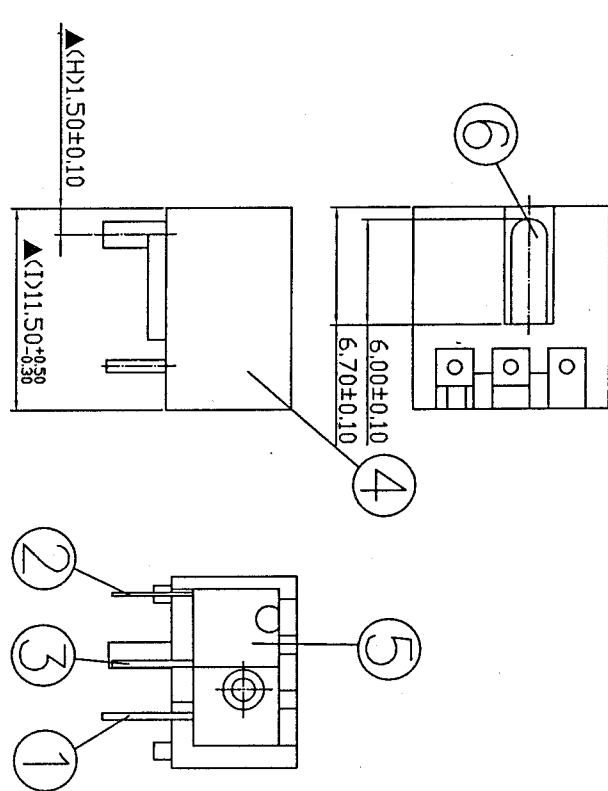
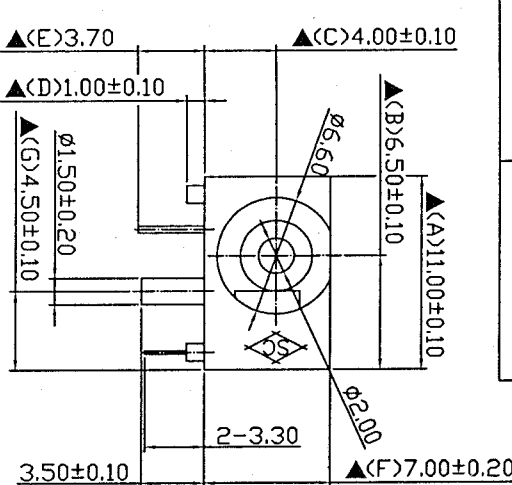
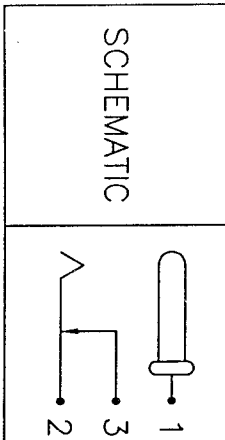




NO.	Description	Material	Q'ty	Finish
6.	Pin(2.0ø)	Copper	1	Nickel Plated
5.	Cover	PBT	1	Black Color
4.	Housing	PBT	1	Black Color
3.	Breck Terminal	0.4T Brass	1	Silver Plated
2.	Sleeve Spring	0.2T TicutR1-M-EH	1	Silver Plated
1.	Pin Terminal	0.4T Brass	1	Silver Plated

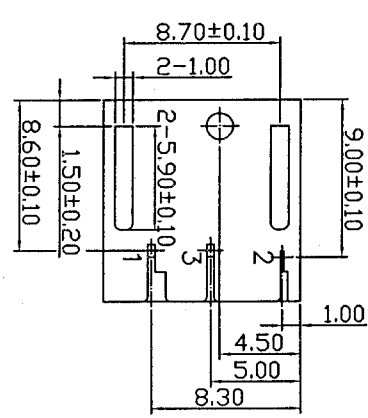

S.C. PRECISION INDUSTRIAL CO., LTD.

PART NAME : DC POWER JACK PART NUMBER:SCD447CCS000B00G

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED


DATE	DWN	CHKD	APVD	MANAGER
10.26.2005	鄧華香	鄧華香	鄧華香	鄧華香

VERSION:1.6

SCALE:1/1

SPECIFICATIONS:

See "Details of Environment-Related Substances"
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲ : The Most Important Dimension



Pin Hole Layout
 (Jack Bottom View)