
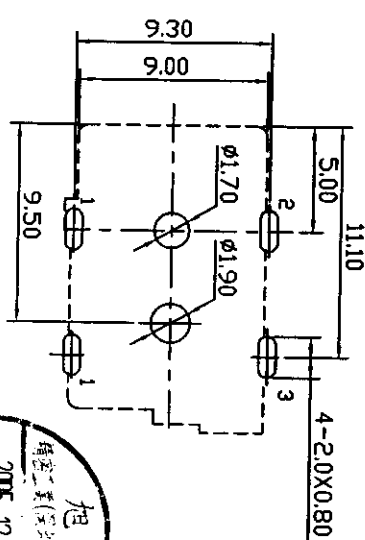
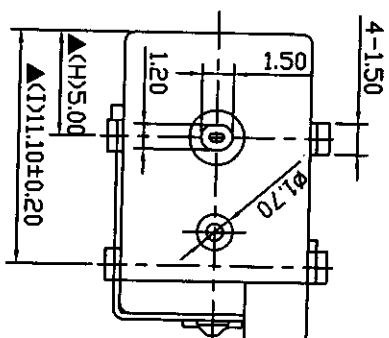
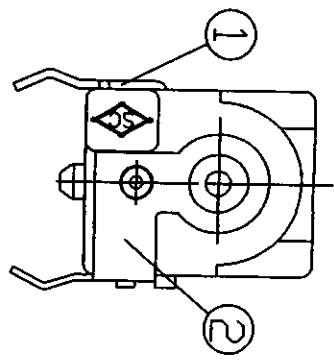
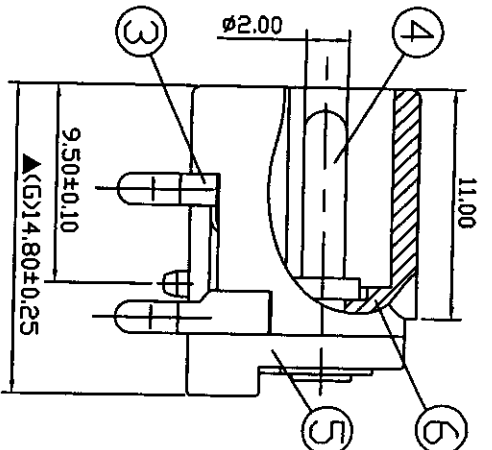


SCHEMATIC	
MODEL NO	C

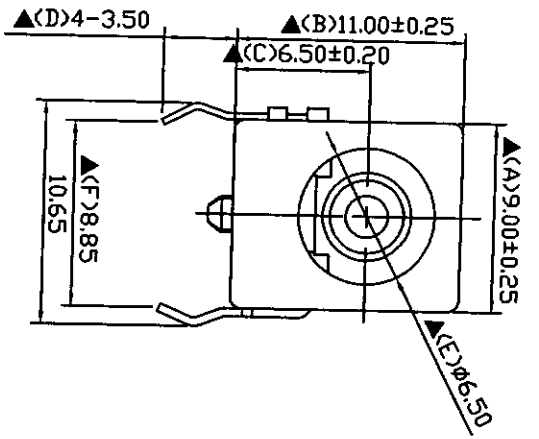

Pin Hole Layout
(Jack Bottom View)

6. Housing	PA9T	1	Black Color
5. Cover	PA9T	1	Black Color
4. Pin(2.0Ø)	Copper	1	Nickel Plated
3. Sleeve Spring	0.3T Phosphor Bronze	1	Silver Plated
2. Pin Terminal	0.3T Bronze	1	Silver Plated
1. Break Terminal	0.4T Bronze	1	Silver Plated
NO. Description	Material	Q'TY	Finish

S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
12.14.2005	易愛娣			總經理 蕭金

PART NAME : DC POWER JACK PART NUMBER:SCD480CCS013B00G

VERSION:3.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm

SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲ : The Most Important Dimension

文管中心
2005.12.24

旭全
2005.12.24
圖面發行