

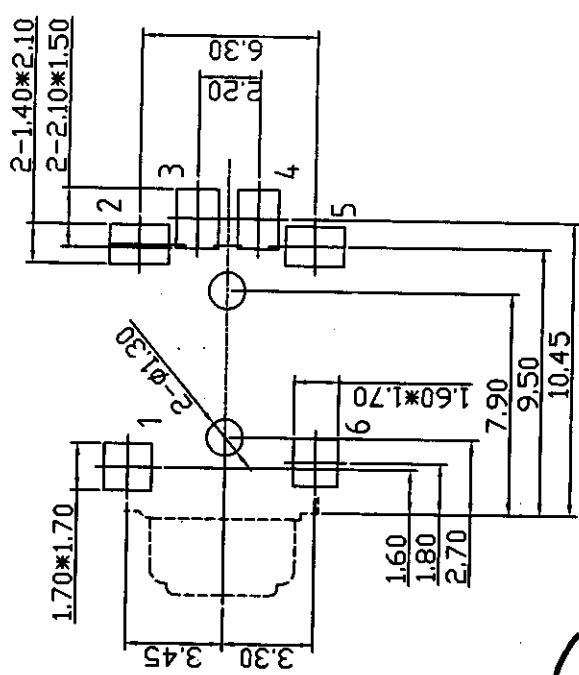
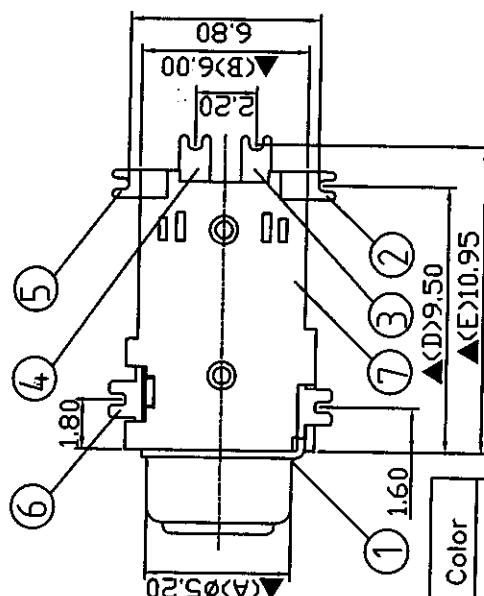

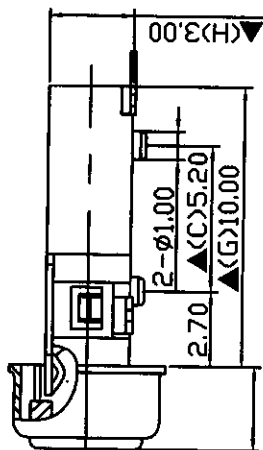


SCHEMATIC

MODEL NO



Pin Hole Layout
(Jack Bottom View)



NO.	Description	Material	Q'TY	Finish
7.	Housing	PA9T	1	Black Color
6.	Earth Terminal	0.2T Phosphor Bronze	1	Silver Plating
5.	Tip Spring	0.2T Phosphor Bronze	1	Silver Plating
4.	Break Spring	0.25T Brass	1	Silver Plating
3.	Break Spring	0.25T Brass	1	Silver Plating
2.	Ring Spring	0.2T Phosphor Bronze	1	Silver Plating
1.	Earth Terminal	0.25T Brass	1	Gold Plating



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
12.02.2005	鄧華香	陳芳	Y. Wang	黃偉志
VERSION: 5.0				SCALE: 1/1

PART NAME : 2.5φ PHONE JACK PART NUMBER: SCJ246R5GJS0B00G

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲ : The Most Important Dimension

